
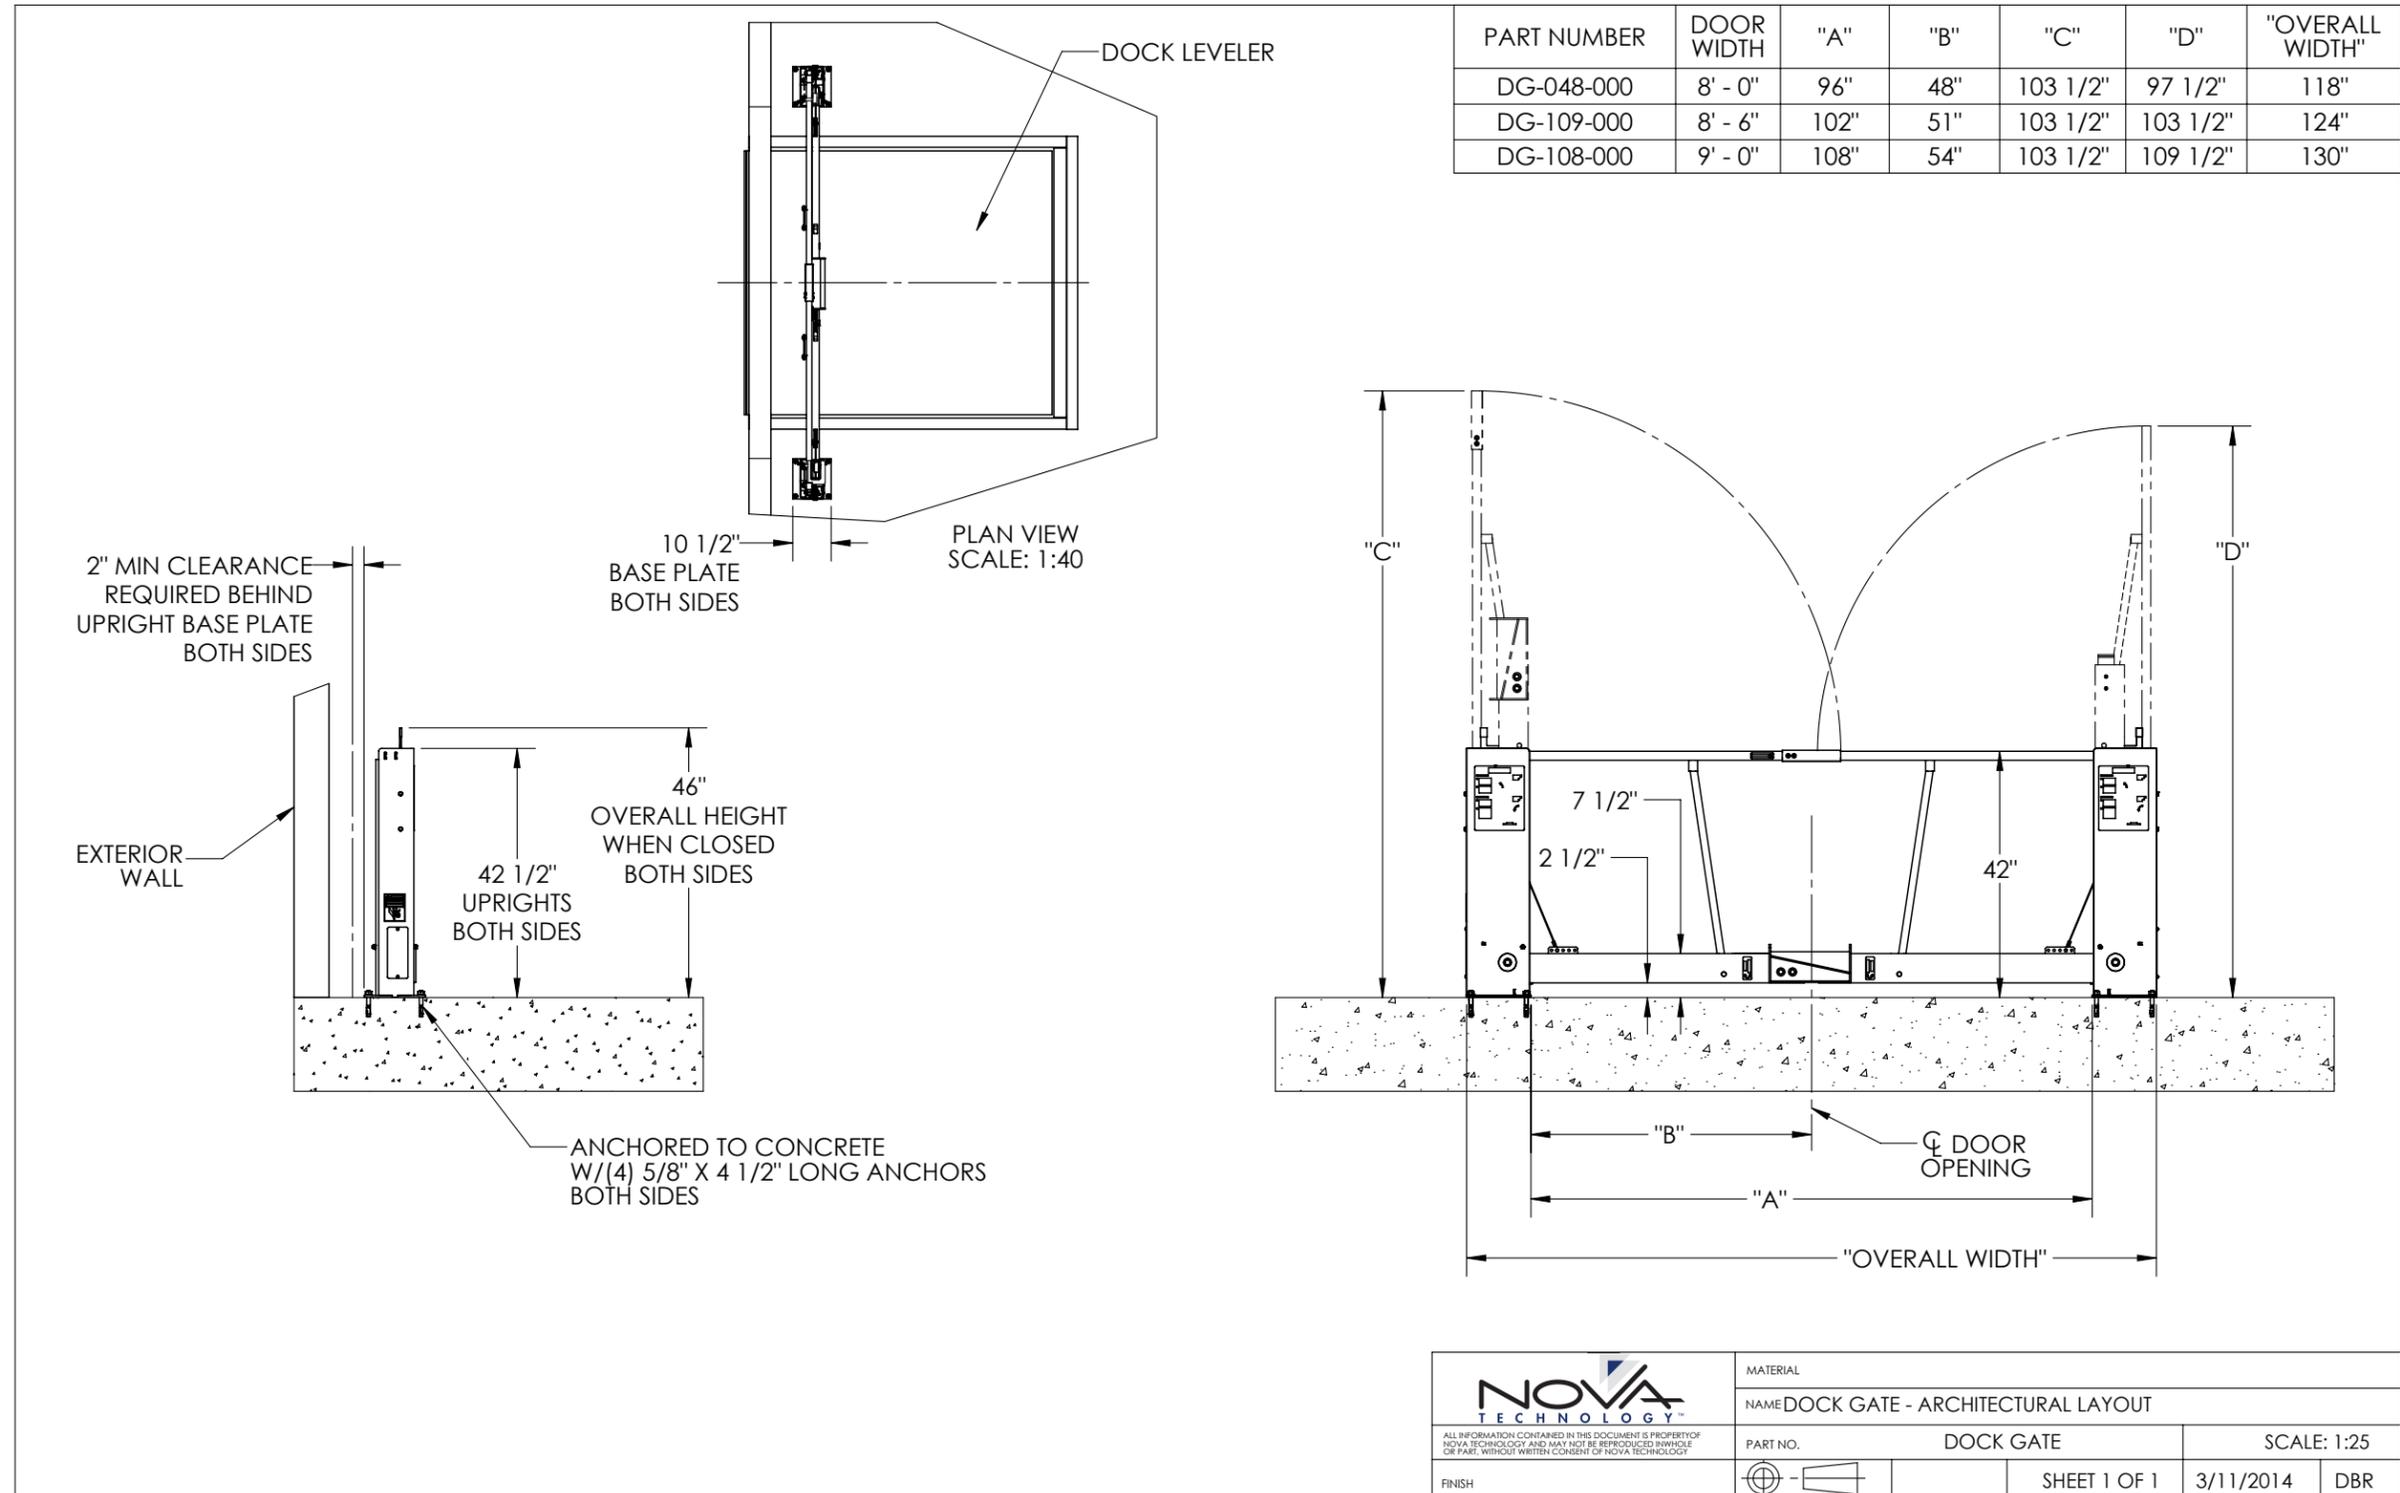



NOVA DOCK SENTINEL™ SAFETY GATE

ARCHITECTURAL DRAWING



		MATERIAL		
		NAME DOCK GATE - ARCHITECTURAL LAYOUT		
<small>ALL INFORMATION CONTAINED IN THIS DOCUMENT IS PROPERTY OF NOVA TECHNOLOGY AND MAY NOT BE REPRODUCED IN WHOLE OR IN PART, WITHOUT WRITTEN CONSENT OF NOVA TECHNOLOGY</small>		PART NO.	DOCK GATE	SCALE: 1:25
		FINISH		SHEET 1 OF 1

NOVA DOCK SENTINEL™ SAFETY GATE

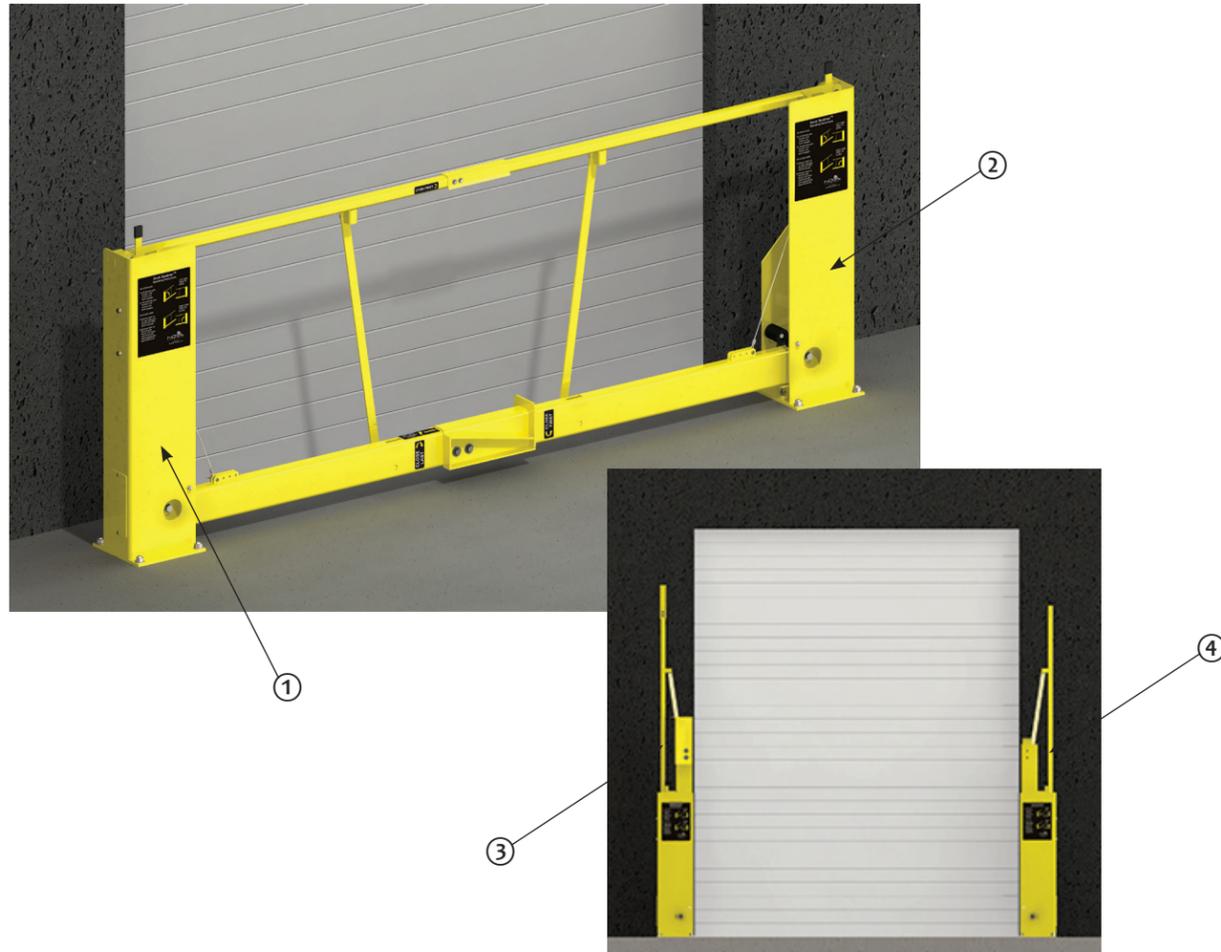

1 — LEFT SIDE UPRIGHT ASSEMBLY
2 — RIGHT SIDE UPRIGHT ASSEMBLY

3 — LEFT SIDE UPPER BARRIER
4 — RIGHT SIDE UPPER BARRIER

STANDARD FEATURES

- ✓ Flex hinge design dissipates impact energy to withstand multiple impacts from pallets or pallet jacks
- ✓ Easy manual operation with controlled descent
- ✓ Gate provides full door width pass-through clearance
- ✓ Barriers secure in the upward position with self-engaging latches
- ✓ Lower barrier construction of 1/4-inch wall ASTM A500 structural steel tubing
- ✓ Upper barrier is 42-inches high (above floor level) when closed
- ✓ Durable highly visible safety yellow powder coat finish
- ✓ One-year warranty against manufacturer's defects
- ✓ Available in lengths from 8 to 9-feet



 **WARNING:** Cancer and Reproductive Harm-www.P65Warnings.ca.gov