



NOVA EZ-LOCK™

ARCHITECTURAL DRAWING

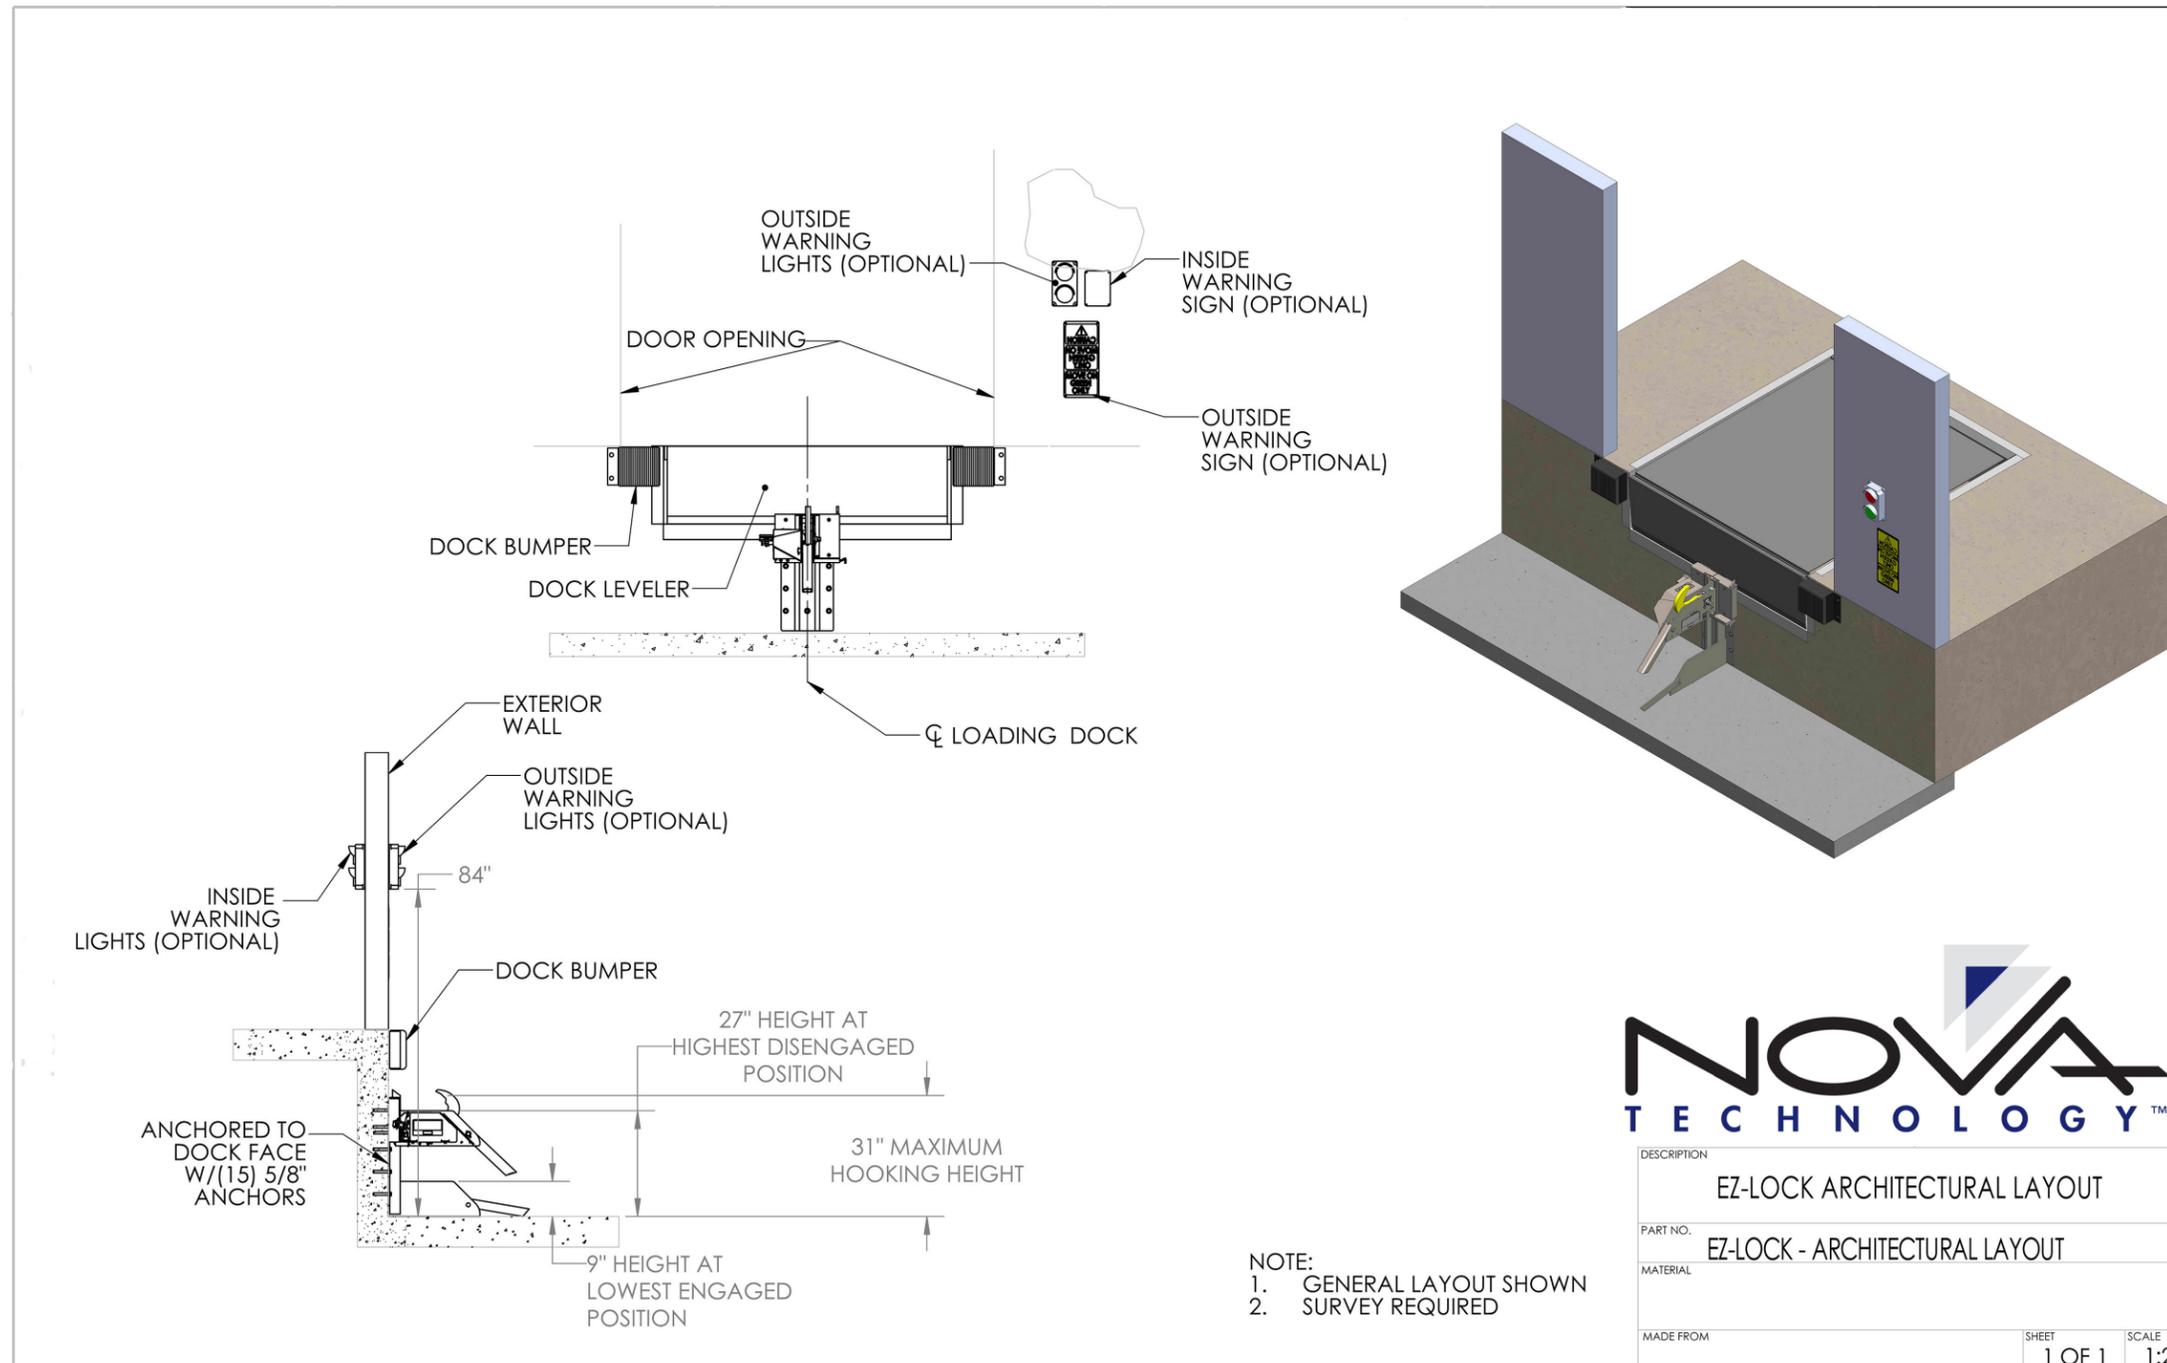

NOVA EZ-LOCK™

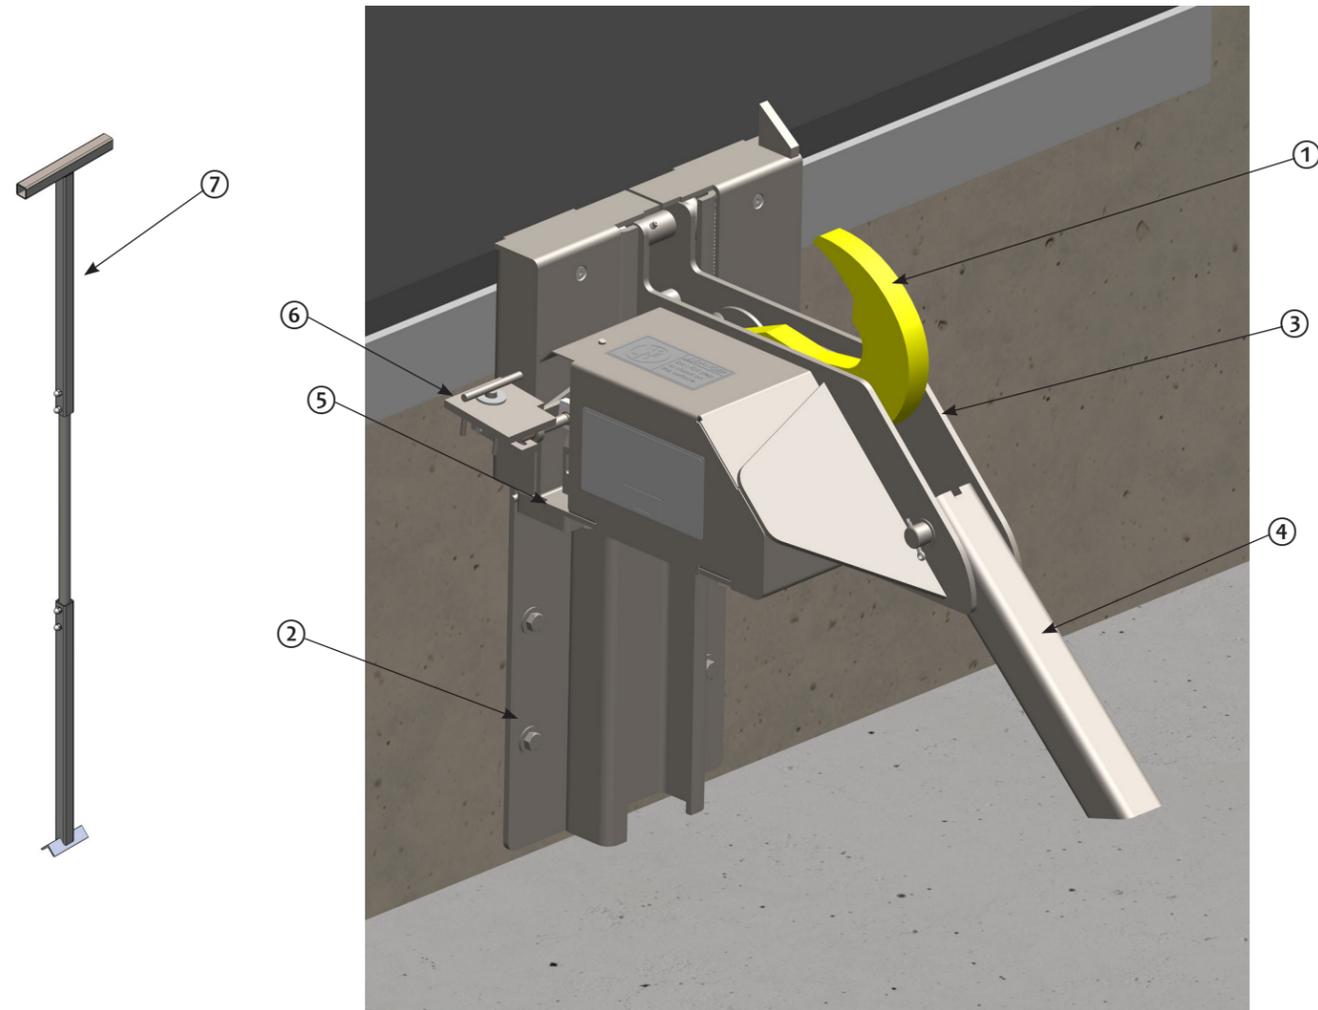

- 1 – HOOK
- 2 – ROLLER TRACK ASSEMBLY
- 3 – CARRIAGE ASSEMBLY
- 4 – SLOPE EXTENSION

- 5 – SPRING MOUNTING PLATE
- 6 – MANUAL ACTIVATION
- 7 – HANDLE

STANDARD FEATURES

- Over 32,000-pounds of restraining force
- Low-profile carriage with an engagement range of 9 to 31-inches
- Zinc-plated track and housing provides high corrosion resistance
- Upward bias rotating hook ensures the RIG is secure
- Manual operation means that no electrical installation is required
- Equipped with Nova's patented Triple Range Hook

OPTIONAL FEATURES

- Articulated slope extension
- Projection brackets and reinforcing plates
- Manually activated inside and outside signal lights



 **WARNING:** Cancer and Reproductive Harm-www.P65Warnings.ca.gov