



NOVA EZ-LOCK™

ARCHITECTURAL DRAWING

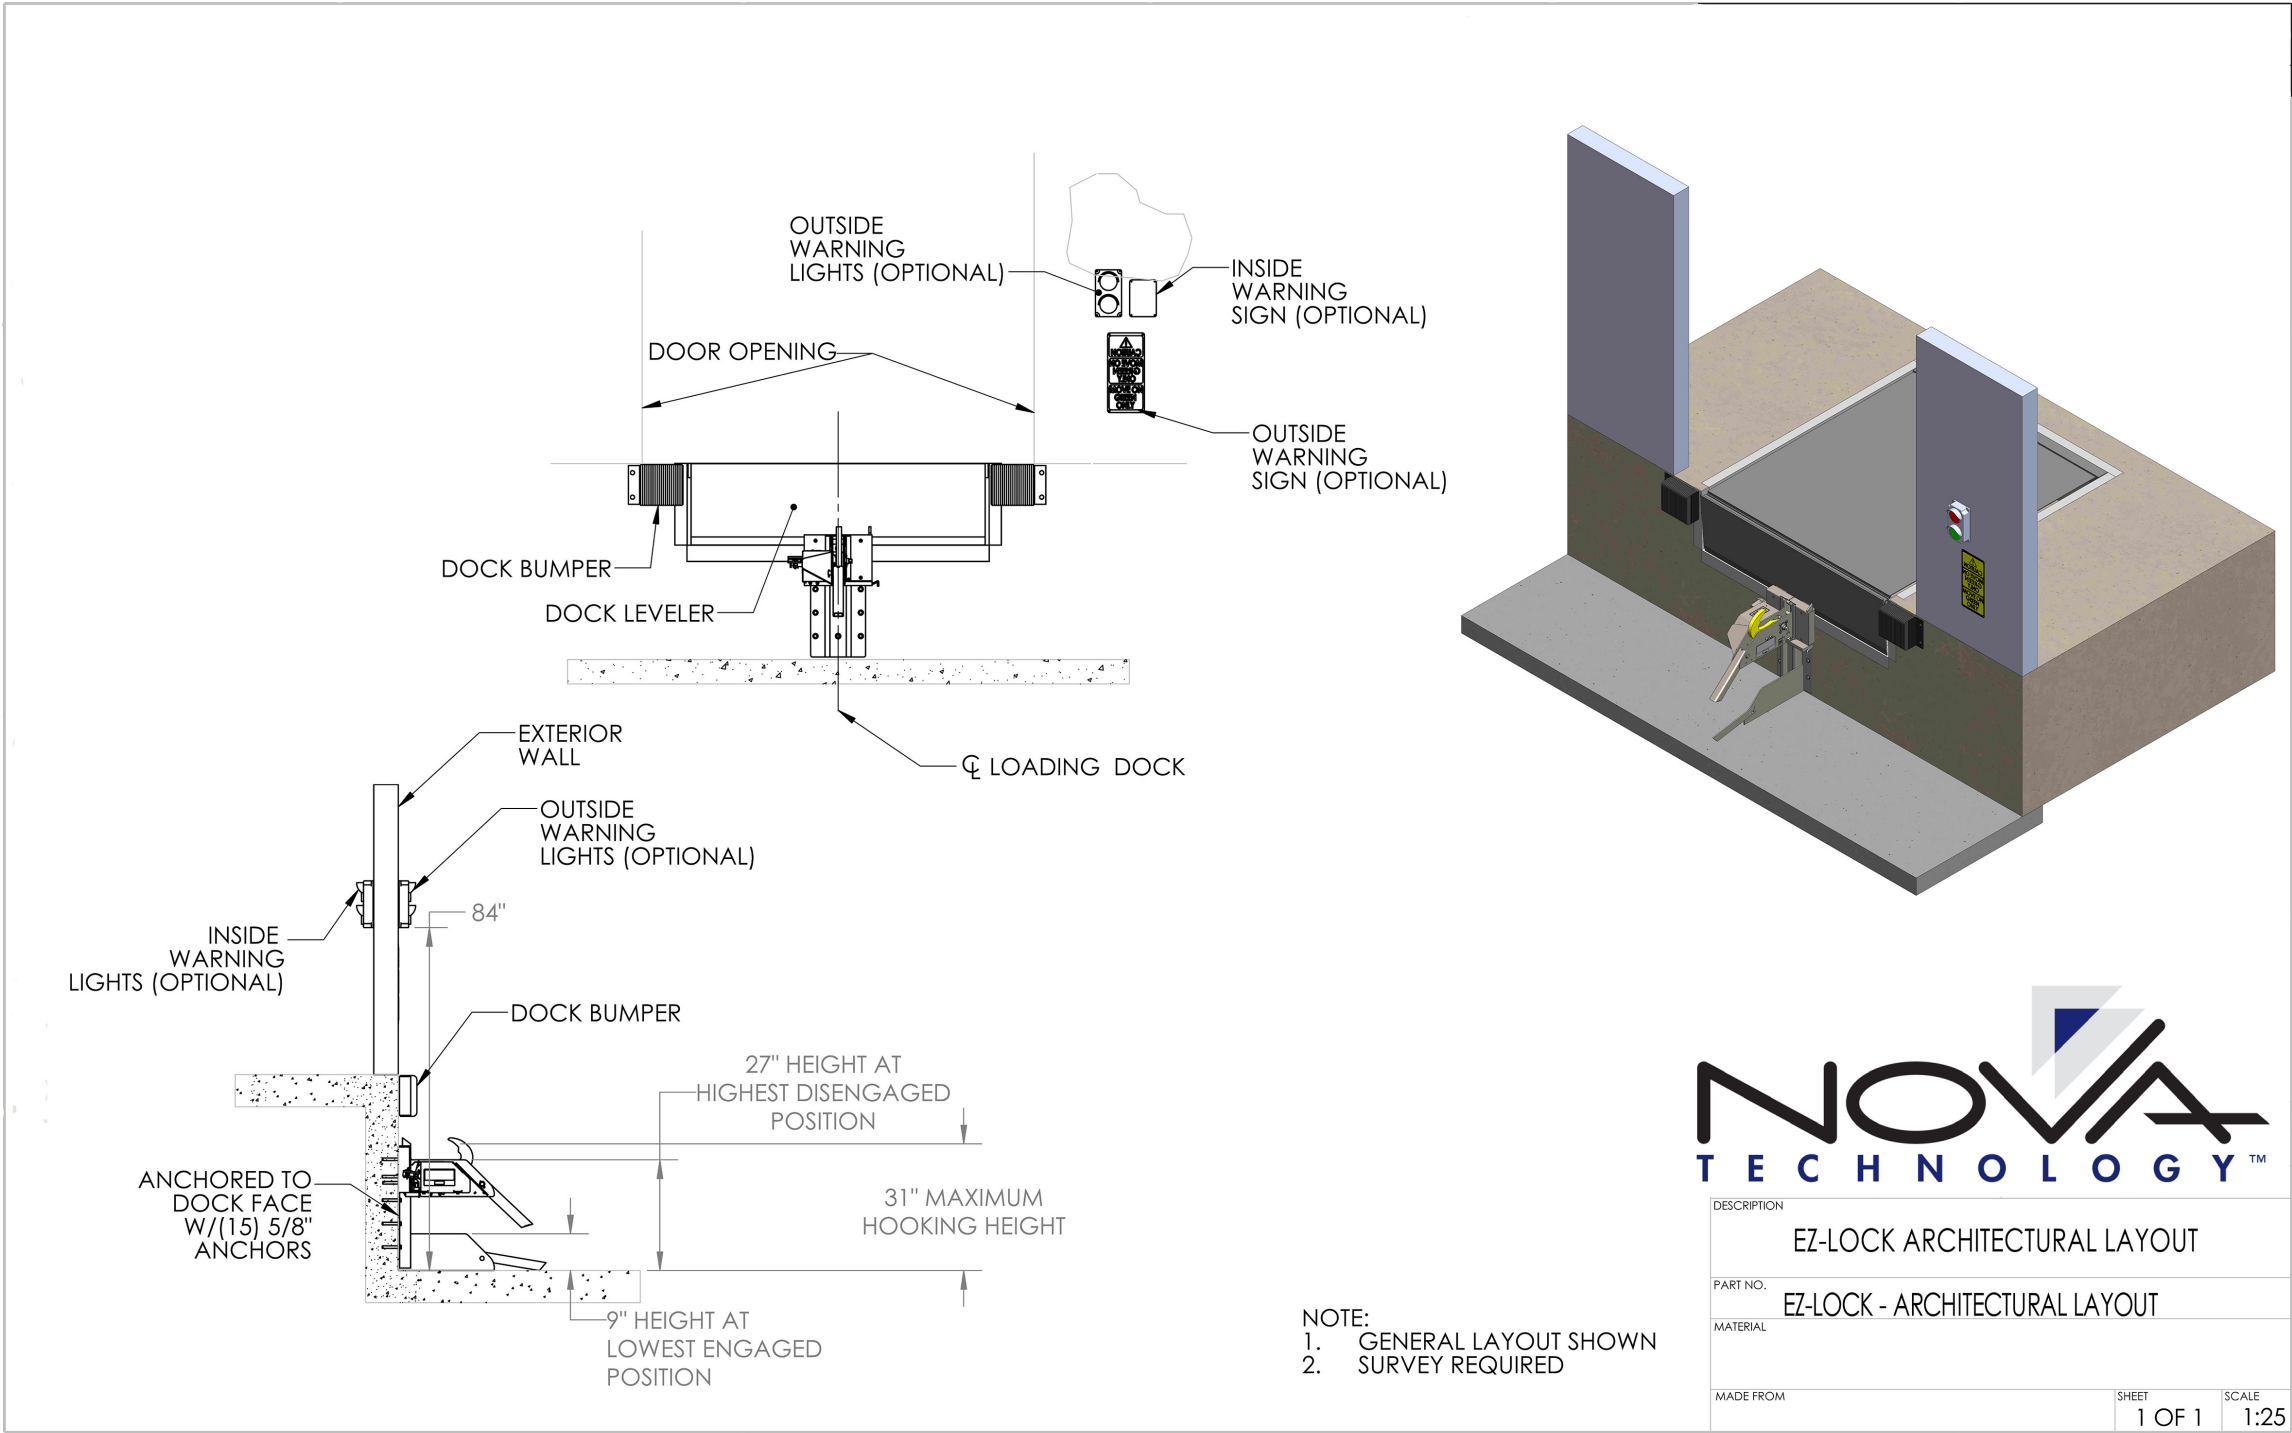

NOVA EZ-LOCK™

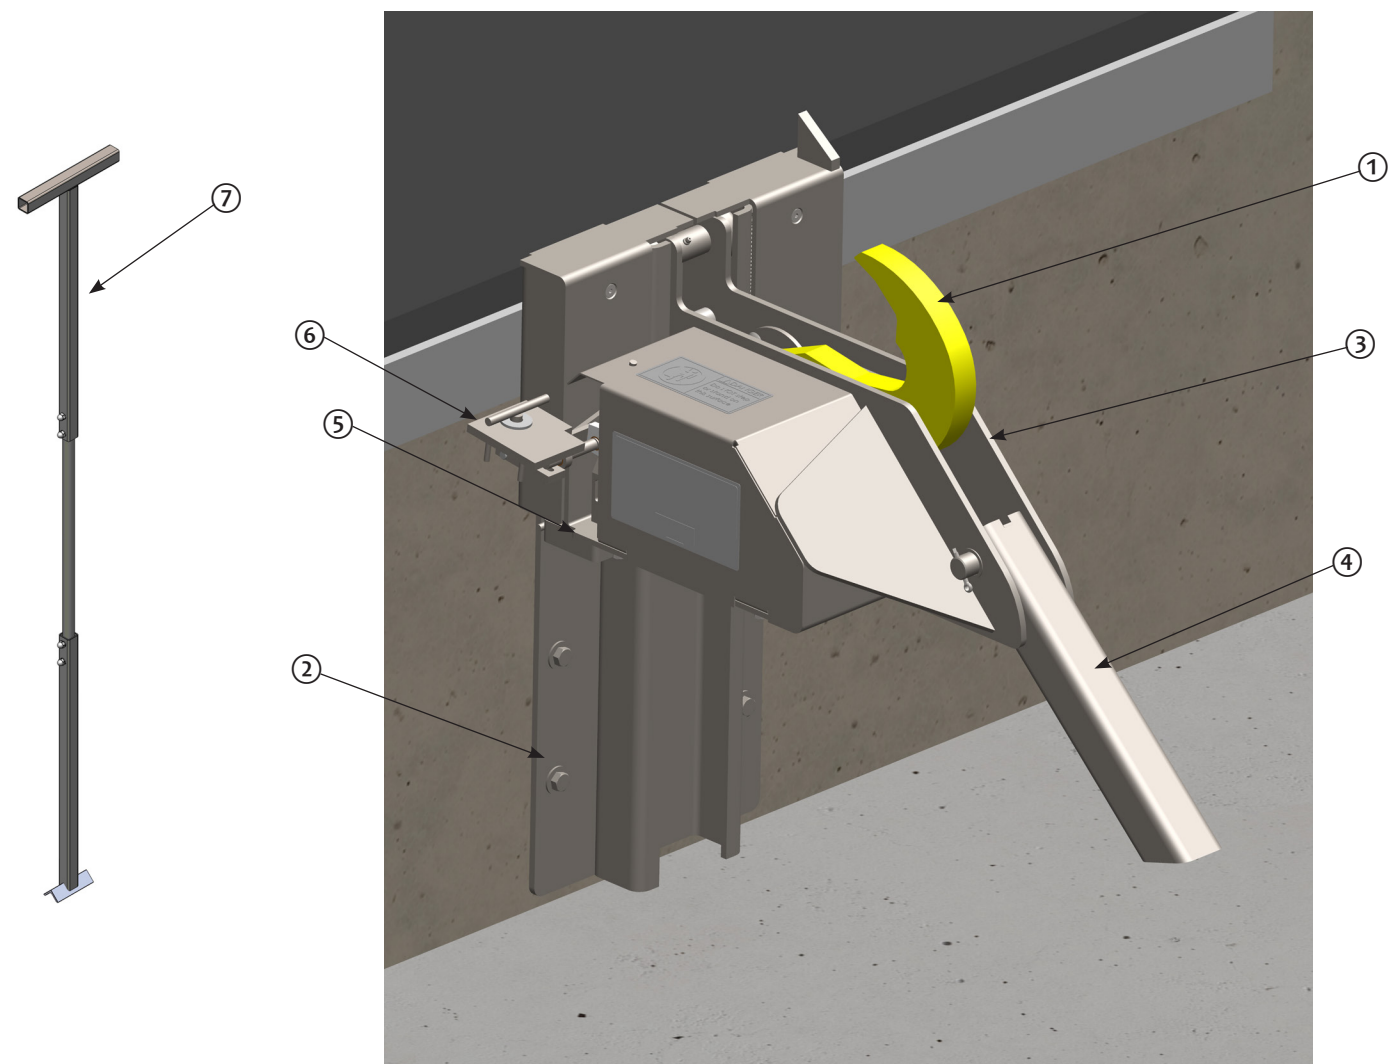

1 — HOOK
2 — ROLLER TRACK ASSEMBLY
3 — CARRIAGE ASSEMBLY
4 — SLOPE EXTENSION

5 — SPRING MOUNTING PLATE
6 — MANUAL ACTIVATION
7 — HANDLE

STANDARD FEATURES

- ☒ Over 32,000-pounds of restraining force
- ☒ Low-profile carriage with an engagement range of 9 to 31-inches
- ☒ Zinc-plated track and housing provides high corrosion resistance
- ☒ Upward bias rotating hook ensures the RIG is secure
- ☒ Manual operation means that no electrical installation is required
- ☒ Equipped with Nova's patented Triple Range Hook

OPTIONAL FEATURES

- ☐ Articulated slope extension
- ☐ Projection brackets and reinforcing plates
- ☐ Manually activated inside and outside signal lights
- ☐ Automatically activated inside and outside signal lights



 **WARNING:** Cancer and Reproductive Harm-www.P65Warnings.ca.gov