

FOREVERSEAL FOAM PAD HOOD (FPH) DOCK SEAL SURVEY

FEATURING PATENTED QUICK-MOUNT SYSTEM W/LIGHTWEIGHT BACKER & SIDE BRACKET

SITE SURVEY INFORMATION

Number of Doors _____

Door Width (W) _____ FT. _____ IN.

Door Height (H) _____ FT. _____ IN.

Dock Height (D) _____ IN.

Bumper Projection (B) _____ IN.

Wall Setback (S) _____ IN.

Leveler Cantilever (C) _____ IN.

Distance Between Doors _____ IN.


Projections for Typical Dock/Facia Combinations:

Fig A: Bumpers Only "Flush Mount" (B)

Fig B: Wall Setback (S+B)


Fig C: Leveler Cantilever (C+B)

Fig D: Wall Setback AND Leveler Cantilever (S + C + B)

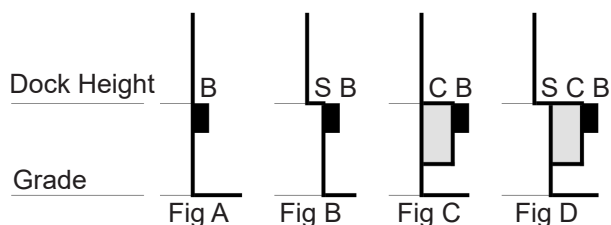

DRIVEWAY GRADE INFORMATION

☐ Level ☐ Decline Grade % _____ ☐ Incline Grade % _____

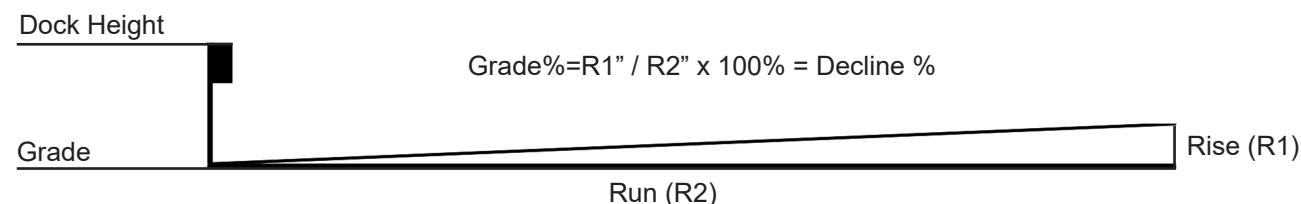

TRUCK/TRAILER INFORMATION

Width: Min _____ Max _____

Height: Min _____ Max _____

Length: Min _____ Max _____

Hydraulic Tailgate: ☐ No ☐ Yes Size _____

Rear Step Section: ☐ No ☐ Yes Size _____

Yard Jockeys: ☐ No ☐ Yes

FPH SERIES OPTIONS

Color: ☐ Black (standard) ☐ Blue* ☐ Brown* ☐ Green* *Only Available in 22 oz & 40 oz

Base Material: ☐ MAX-1000™ ☐ MAX-60™ ☐ 40 oz Vinyl ☐ 22 oz Vinyl

☐ 40 oz FLAME-RETARDANT ☐ 22 oz FLAME-RETARDANT

☐ 40 oz NOVALON™* ☐ 16 oz NOVALON™*

*NOVALON™ is the equivalent replacement for HYPALON®, a trade name used by DuPont.

Wear Pleats: ☐ 4" Exposure ☐ 8" Exposure Wear Pleat Material _____

Hood Options: ☐ Basic w/Chain Weight ☐ Add Pull Rope ☐ Add 2" Foam Filled ☐ Tuf-Tear ☐ No Slit

Bottom Flaps: ☐ None ☐ Inside Only ☐ Inside + Front ☐ Inside, Front + Outside Length _____ in.



WARNING: Cancer and Reproductive Harm-www.P65Warnings.ca.gov