


NOVA MECHANICAL EDGE-OF-DOCK LEVELER


COMPETITIVE PRODUCT COMPARISON

FEATURES AND BENEFITS:

- Dual-extension, roller-bearing spring lift Mechanism or torsion springs
- Self-storing lever with easy grip handle
- One-handed operation with no lifting
- Grease fittings and piano hinges
- Four-way high tensile A572 steel
- Diamond safety tread plate
- 55,000 PSI minimum yield
- Formed center plate for added strength
- Working range 5-inches above/below dock
- Capacities up to 35,000-pounds
- Standard 15-inch lip
- Beveled lip with milled edge
- Deck widths range from 66 to 84-inches
- 4-inch reinforced rubber molded bumpers
- 13 x 14-inch heavy-duty bumper blocks
- 15-inch total bumper/blockout projection
- Four steel support gussets
- Three linkage bars for extra stability
- Automatically returns to stored position
- 1-year warranty

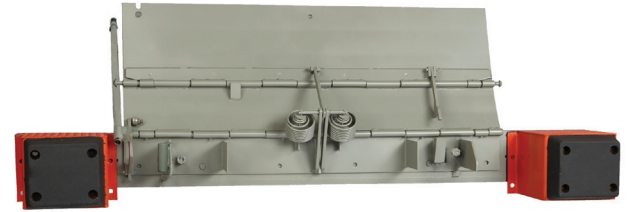

GREATEST CAPACITY: 35,000-POUNDS

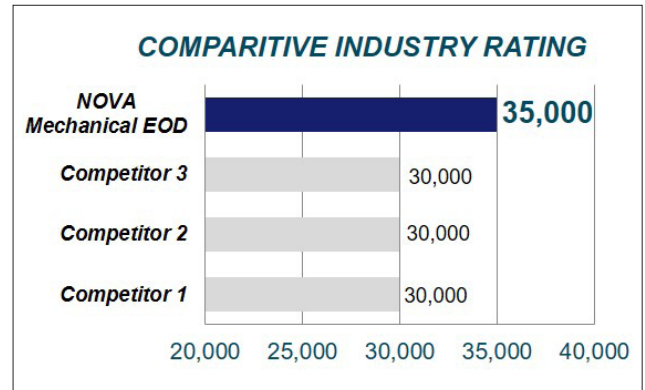

LARGEST SIZE RANGE: 66 to 84-Inches

STANDARD DECK WIDTHS				
MODEL	66"	72"	78"	84"
NOVA	X	X	X	X
Competitors	X	X	X	



MORE SUPPORT FOR ADDED SAFETY: Double the supports provides twice as much strength for below dock loading

STEEL SUPPORT GUSSETS	
NOVA	4
Competitors	2

BETTER PROTECTION: NOVA molded rubber bumpers provide more surface area and larger mounting angles to help prevent building damage



NOVA Molded Rubber Bumpers
4 x 13 x 12-inches



Competitor 1 4 x 10 x 13-inches
Competitor 2 2 x 8 x 18-inches
Competitor 3 4 x 10 x 13-inches



WARNING: Cancer and Reproductive Harm-www.P65Warnings.ca.gov