



NOVA NHS HYDRAULIC DOCK LEVELER

ARCHITECTURAL DRAWING

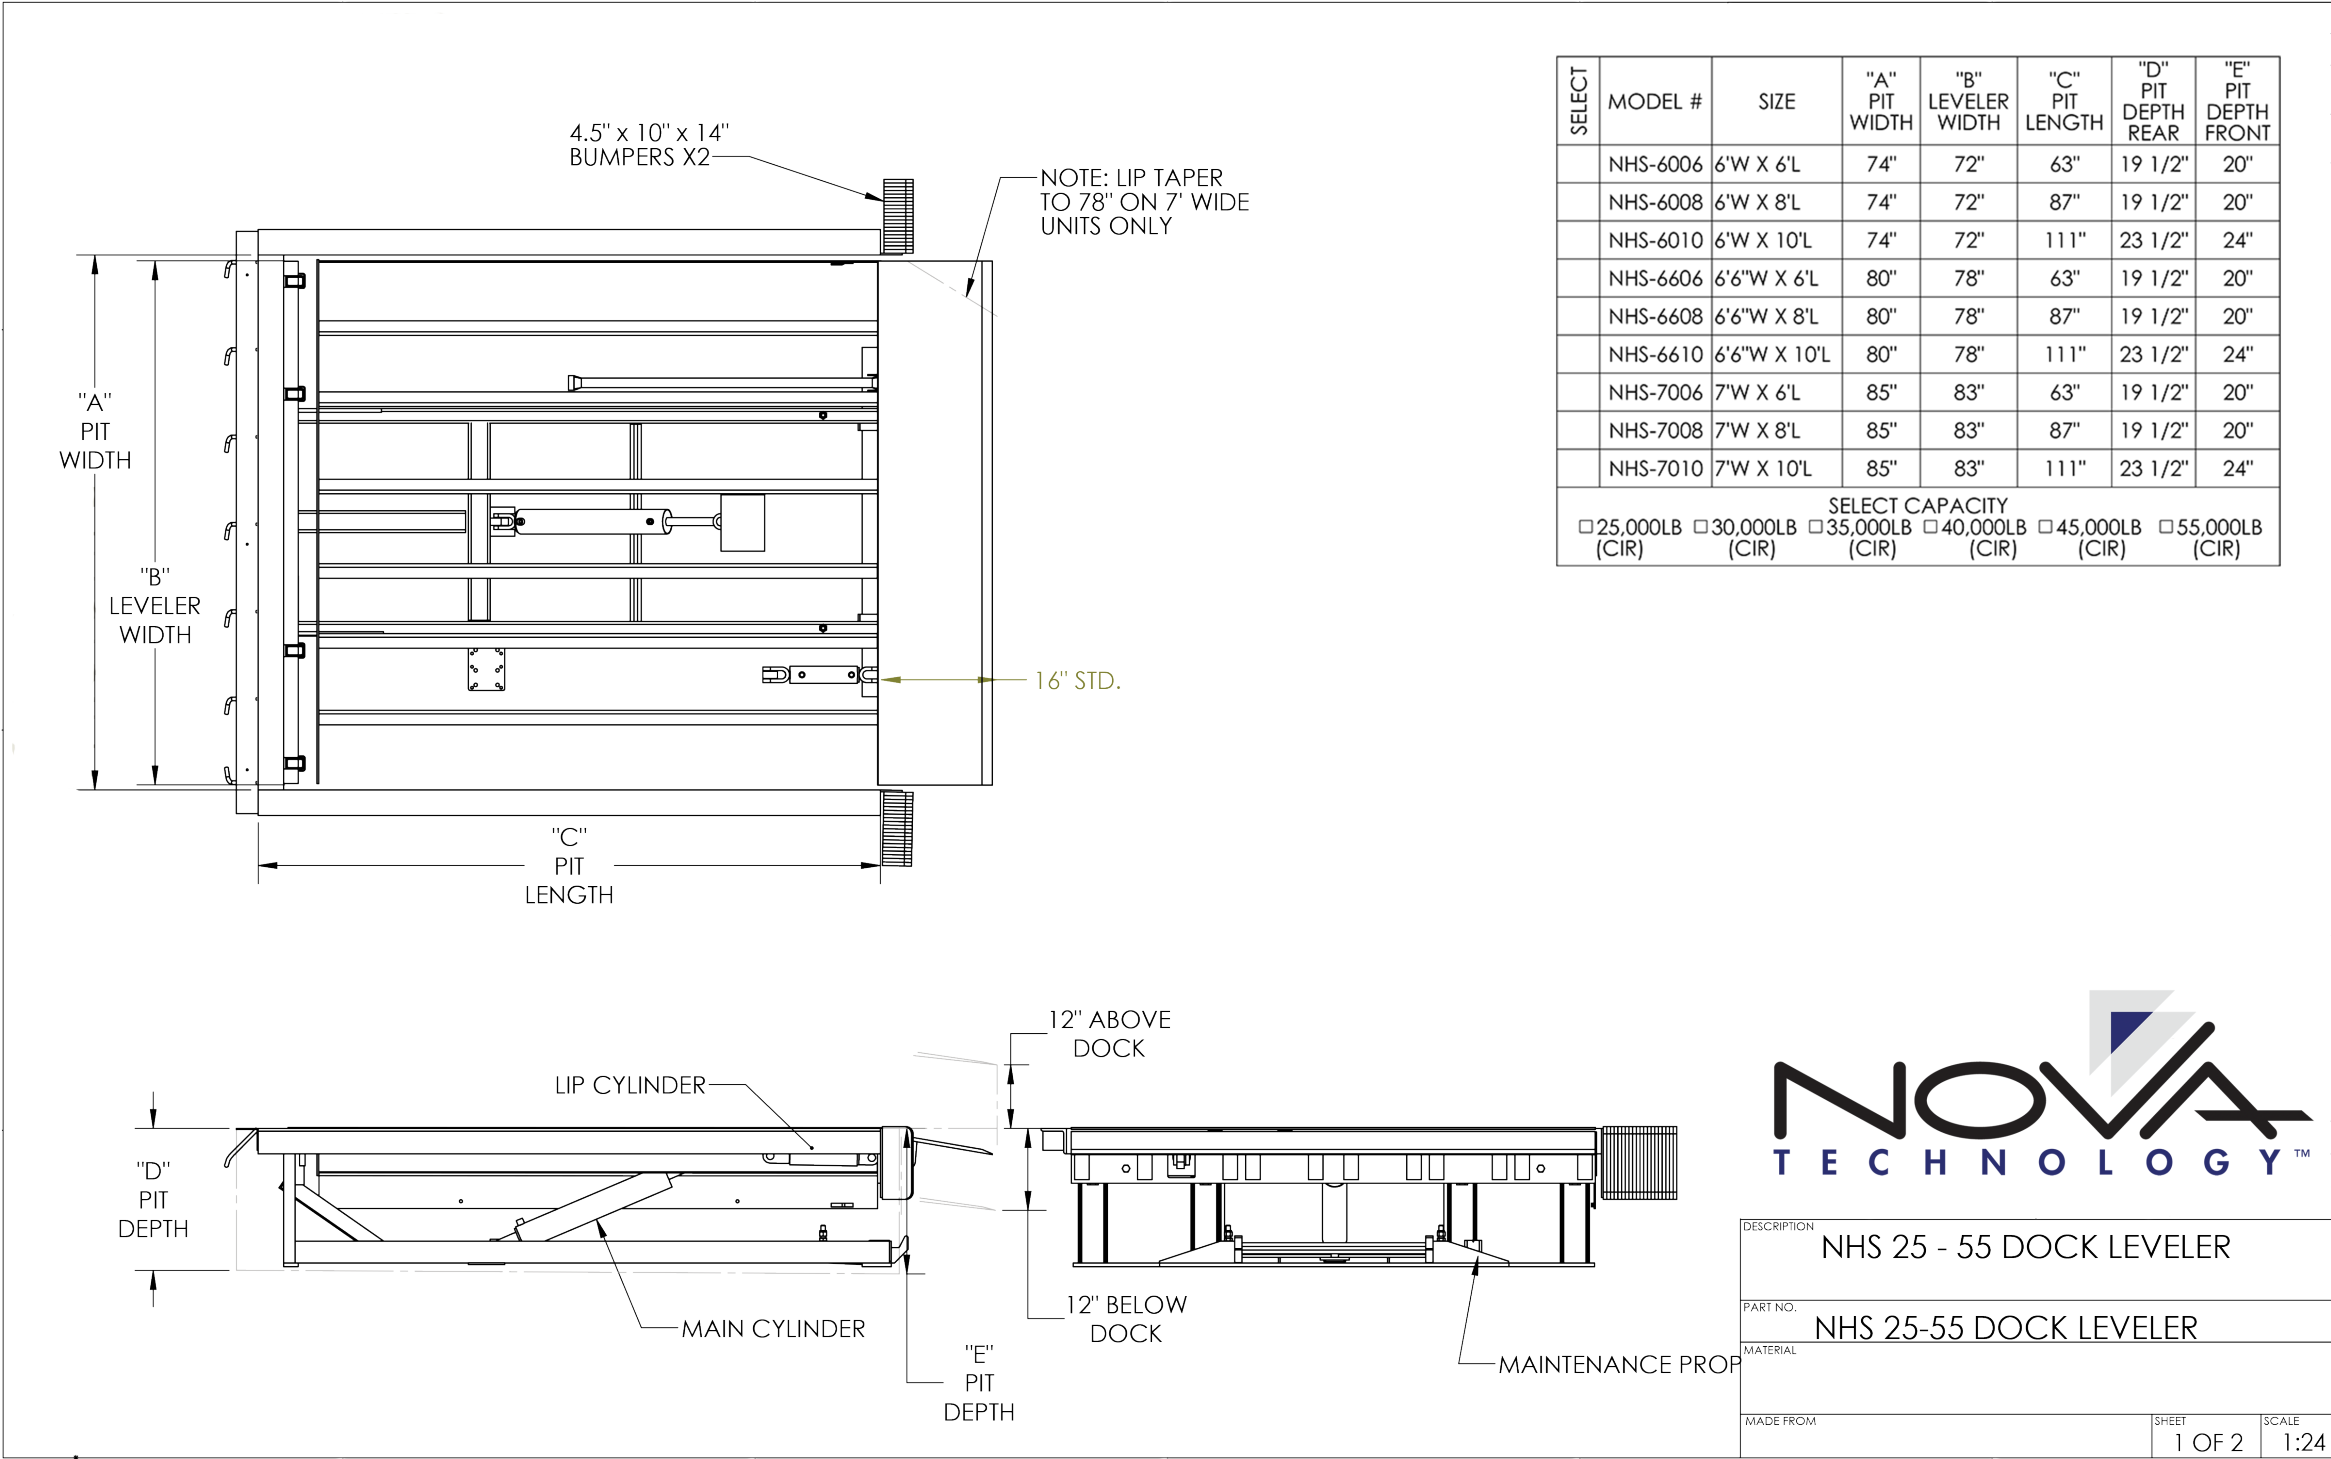

NOVA NHS HYDRAULIC DOCK LEVELER

(25K-55K)

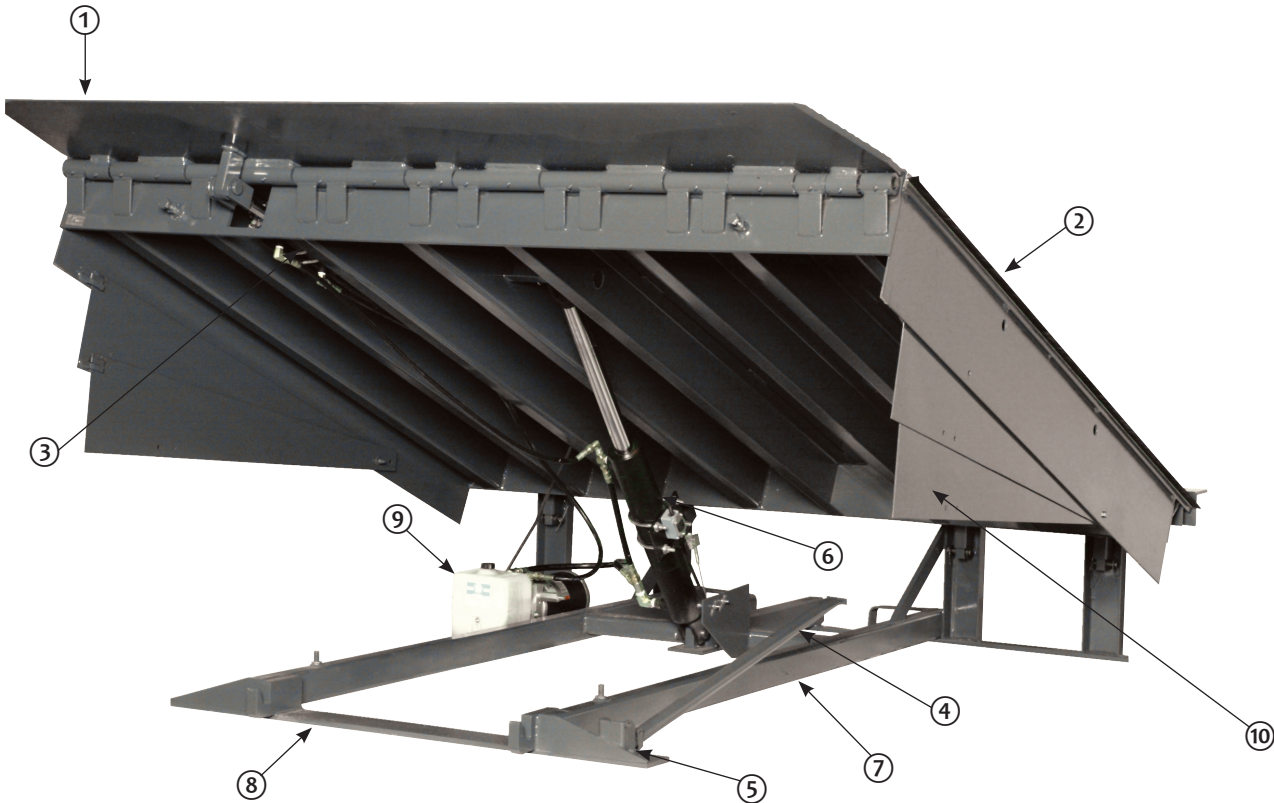

- | | | |
|----------------------|-----------------------|--------------------------------------|
| 1 — LIP | 5 — PROP PIN AND CLIP | 8 — LIP KEEPERS (2 USED) |
| 2 — PLATFORM | 6 — PLATFORM CYLINDER | 9 — POWERPACK (MOTOR/PUMP/RESERVOIR) |
| 3 — LIP CYLINDER | 7 — MAIN FRAME | 10 — FULL RANGE TOE GUARD (2 USED) |
| 4 — MAINTENANCE PROP | | |


STANDARD FEATURES

- ☒ 1 1/4 HP frame-mounted single- or three-phase motor
- ☒ Full range yellow telescoping toe guards
- ☒ Night locks, cross-traffic support
- ☒ Integral tamper-proof velocity safety stop
- ☒ 16-inch yieldable lip
- ☒ Three-wheel support (45,000 and 55,000-pound units)
- ☒ Easy clean frame design
- ☒ Below dock end load capability
- ☒ Positive lip extension and retraction with true regenerative hydraulic control
- ☒ NEMA 12 panel
- ☒ Two 4-inch 1014 laminated bumpers
- ☒ Steel channel deck support members

OPTIONAL FEATURES

- ☐ Rubber weather seal
- ☐ Brush weather seal
- ☐ Optional bumper sizes and types available
- ☐ Three-wheel support (25,000 to 40,000-pound units)
- ☐ 5-inch barrier lip (35,000+ pound units only)
- ☐ 18-inch lip
- ☐ 20-inch lip
- ☐ 24-inch riser kit (24-inch pit depth is standard on all 10-foot long levelers)
- ☐ Wash down
- ☐ 2-inch foam insulation
- ☐ Auto-return to dock
- ☐ E-stop
- ☐ Independent lip
- ☐ NEMA 4 (push-button box)
- ☐ Spray metalized
- ☐ Control box stanchion
- ☐ Cut down leveler length and width
- ☐ Stainless steel pins and lip rods
- ☐ Steel pan: 4-sided
- ☐ Quick pit: 3-sided
- ☐ IntelliDock Combination control box



 **WARNING:** Cancer and Reproductive Harm-www.P65Warnings.ca.gov