



NOVA LOCK & LOAD™

ARCHITECTURAL DRAWING

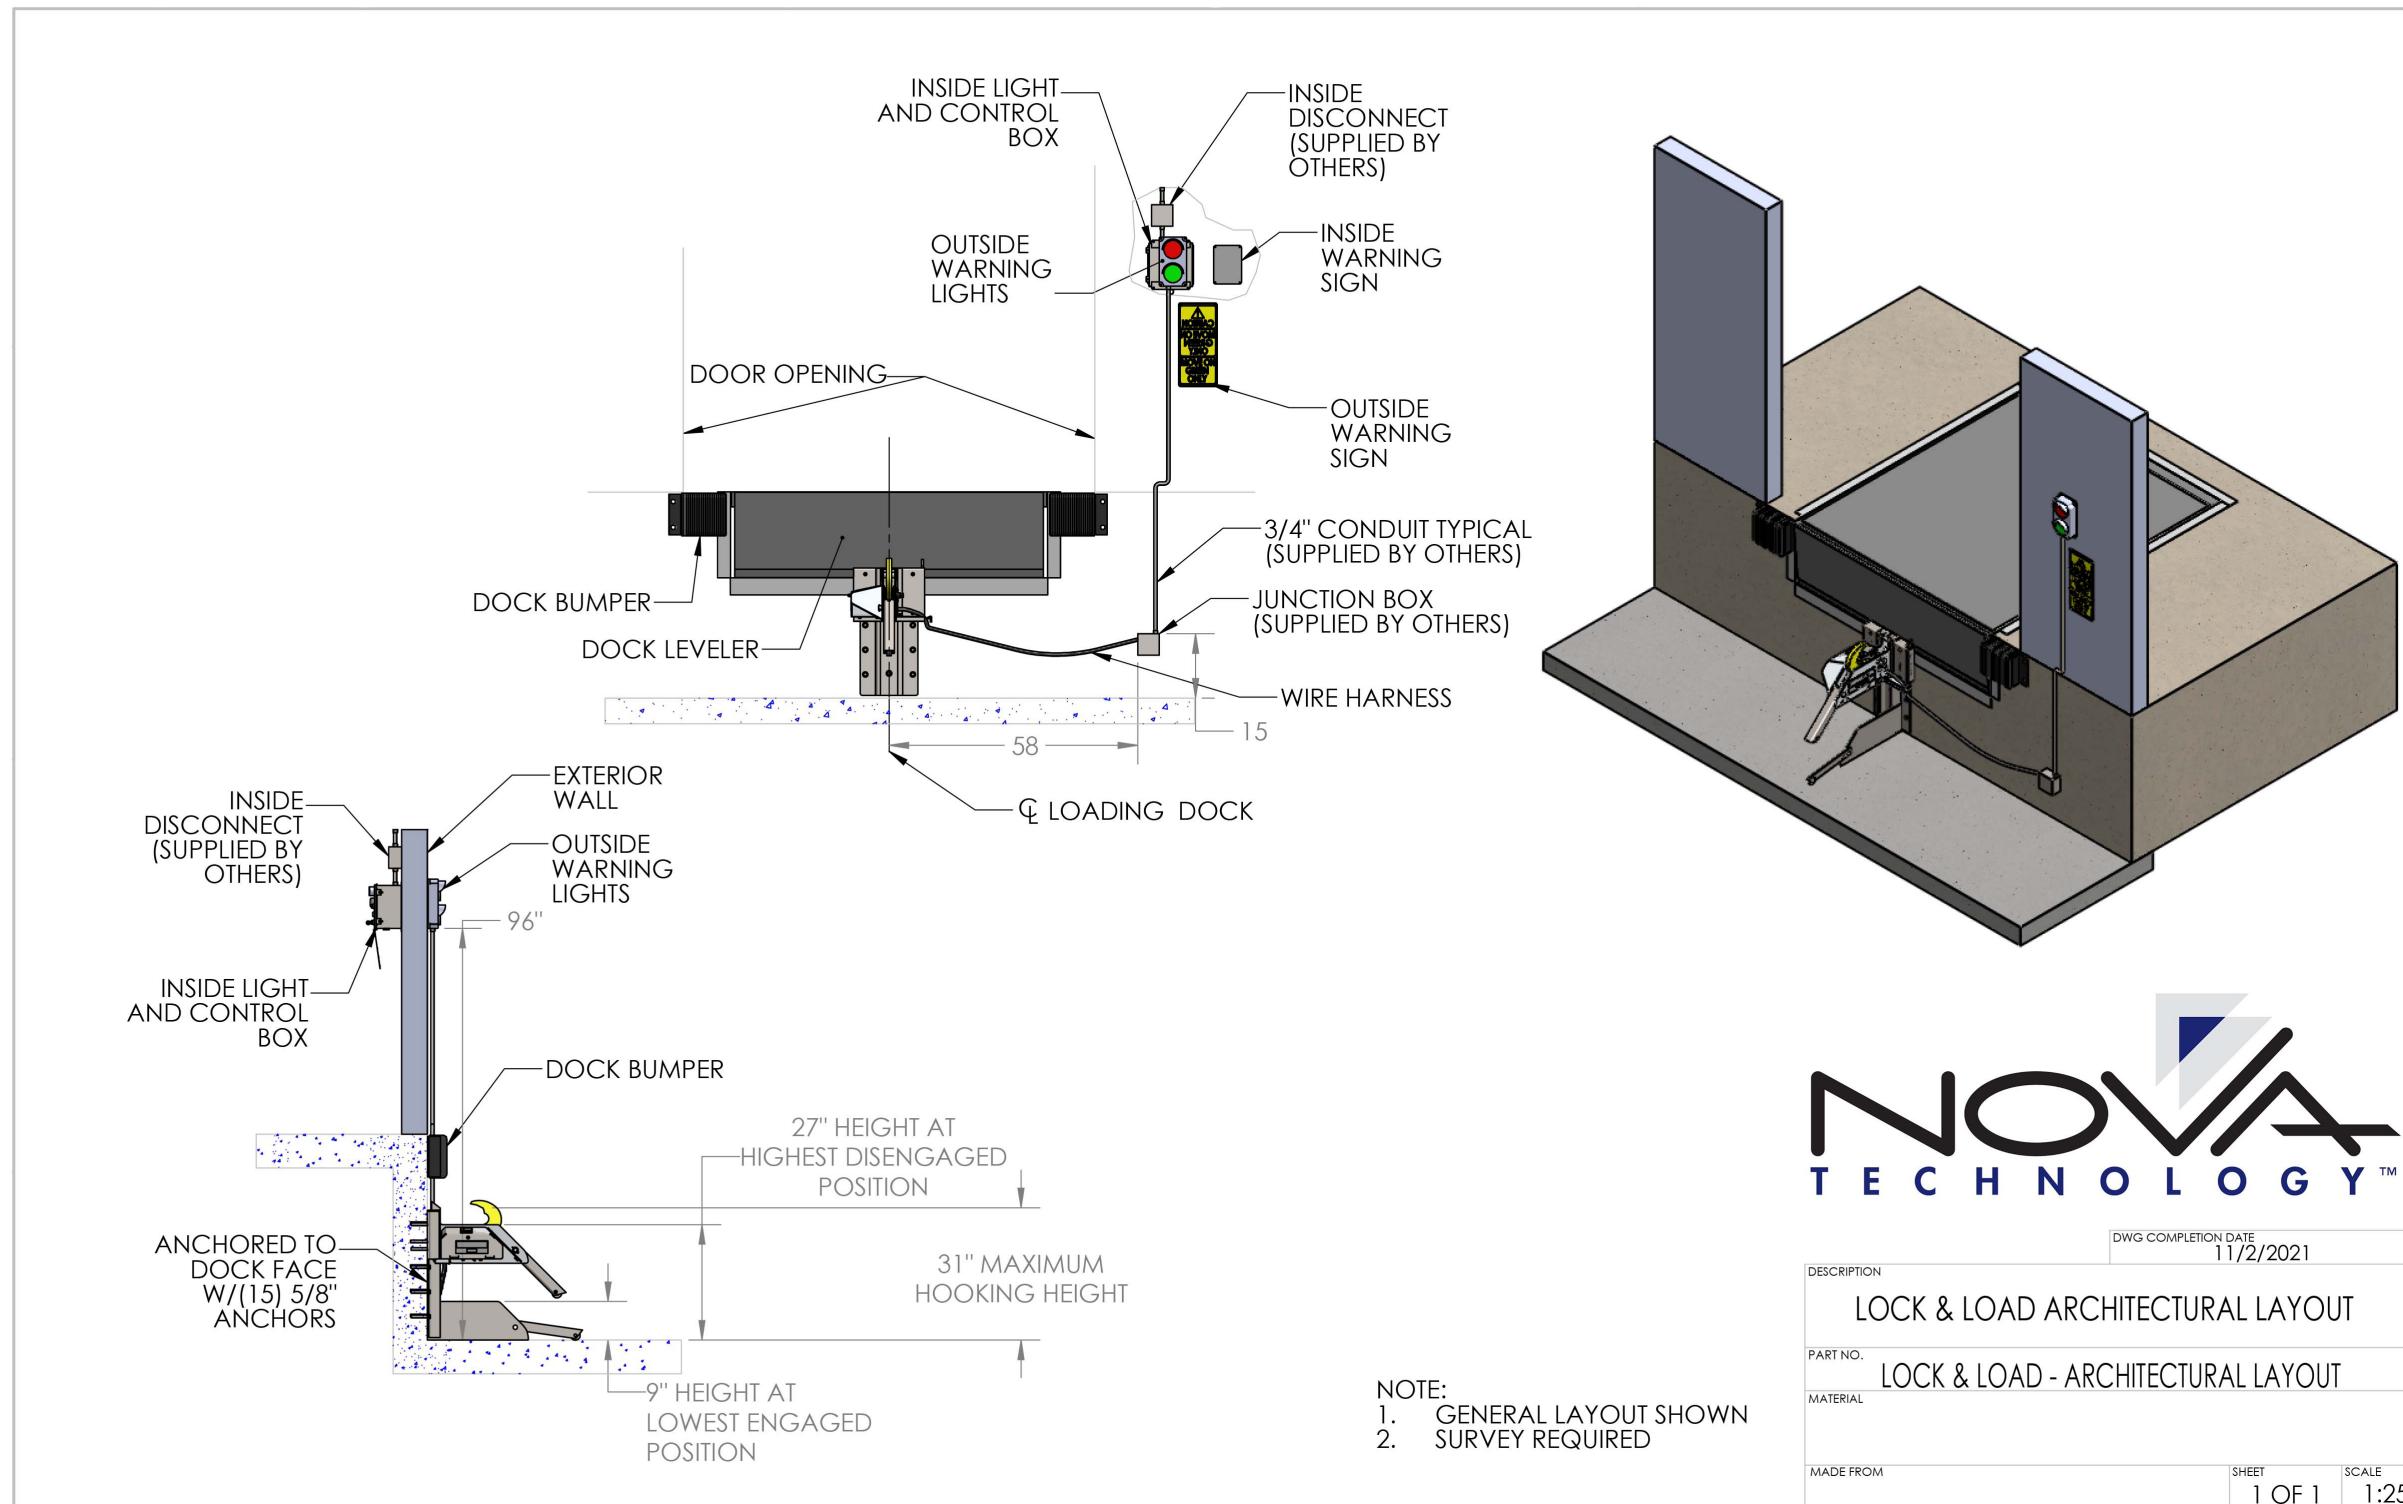

NOVA LOCK & LOAD™

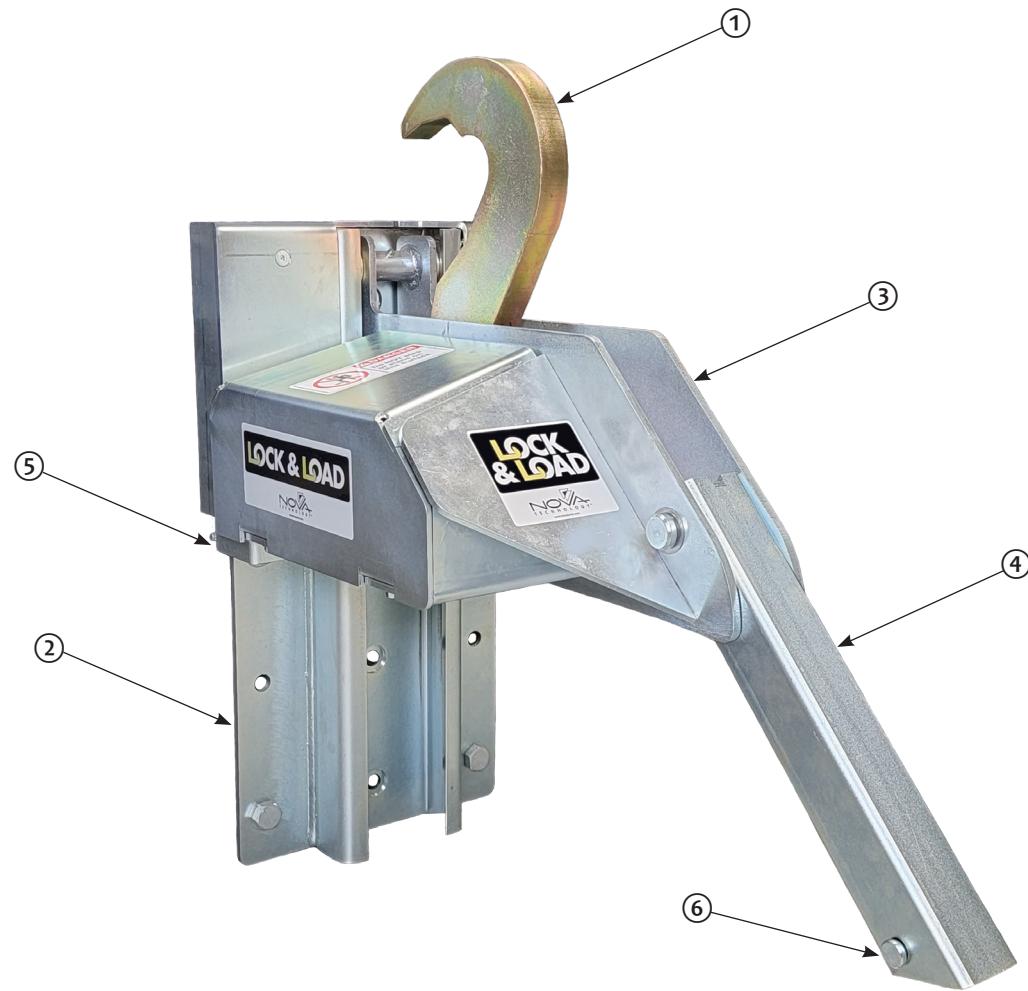

1 — HOOK
2 — ROLLER TRACK ASSEMBLY
3 — CARRIAGE ASSEMBLY

4 — SLOPE EXTENSION
5 — SPRING MOUNTING PLATE
6 — ROLLER ASSEMBLY

STANDARD FEATURES

- Specially designed gear motor keeps the hook continuously engaged
- Roller Slope Extension effortlessly rolls on pavement
- Over 32,000-pounds of restraining force
- LED inside and outside light communication package
- Interior and exterior signage
- Low-profile carriage with an engagement range of 9 to 31-inches
- Zinc-plated track and housing provides high corrosion resistance
- Standard bypass/override is password-protected for use by authorized personnel only
- Upward bias rotating hook ensures the RIG is secure
- Hook maintains engagement with the RIG even if power is lost
- The motor is IP67 compliant
- Non-contact, frictionless system
- PLC-based control box with integrated maintenance diagnostics; optional with CB-20/21

OPTIONAL FEATURES

- IntelliDock Combination control box
- CB-20/21
- Open dock stanchion for control box
- Articulated slope extension
- Projection brackets and reinforcing plates
- Green light interlock with leveler or door