



NOVA LOCK & LOAD™
ARCHITECTURAL DRAWING

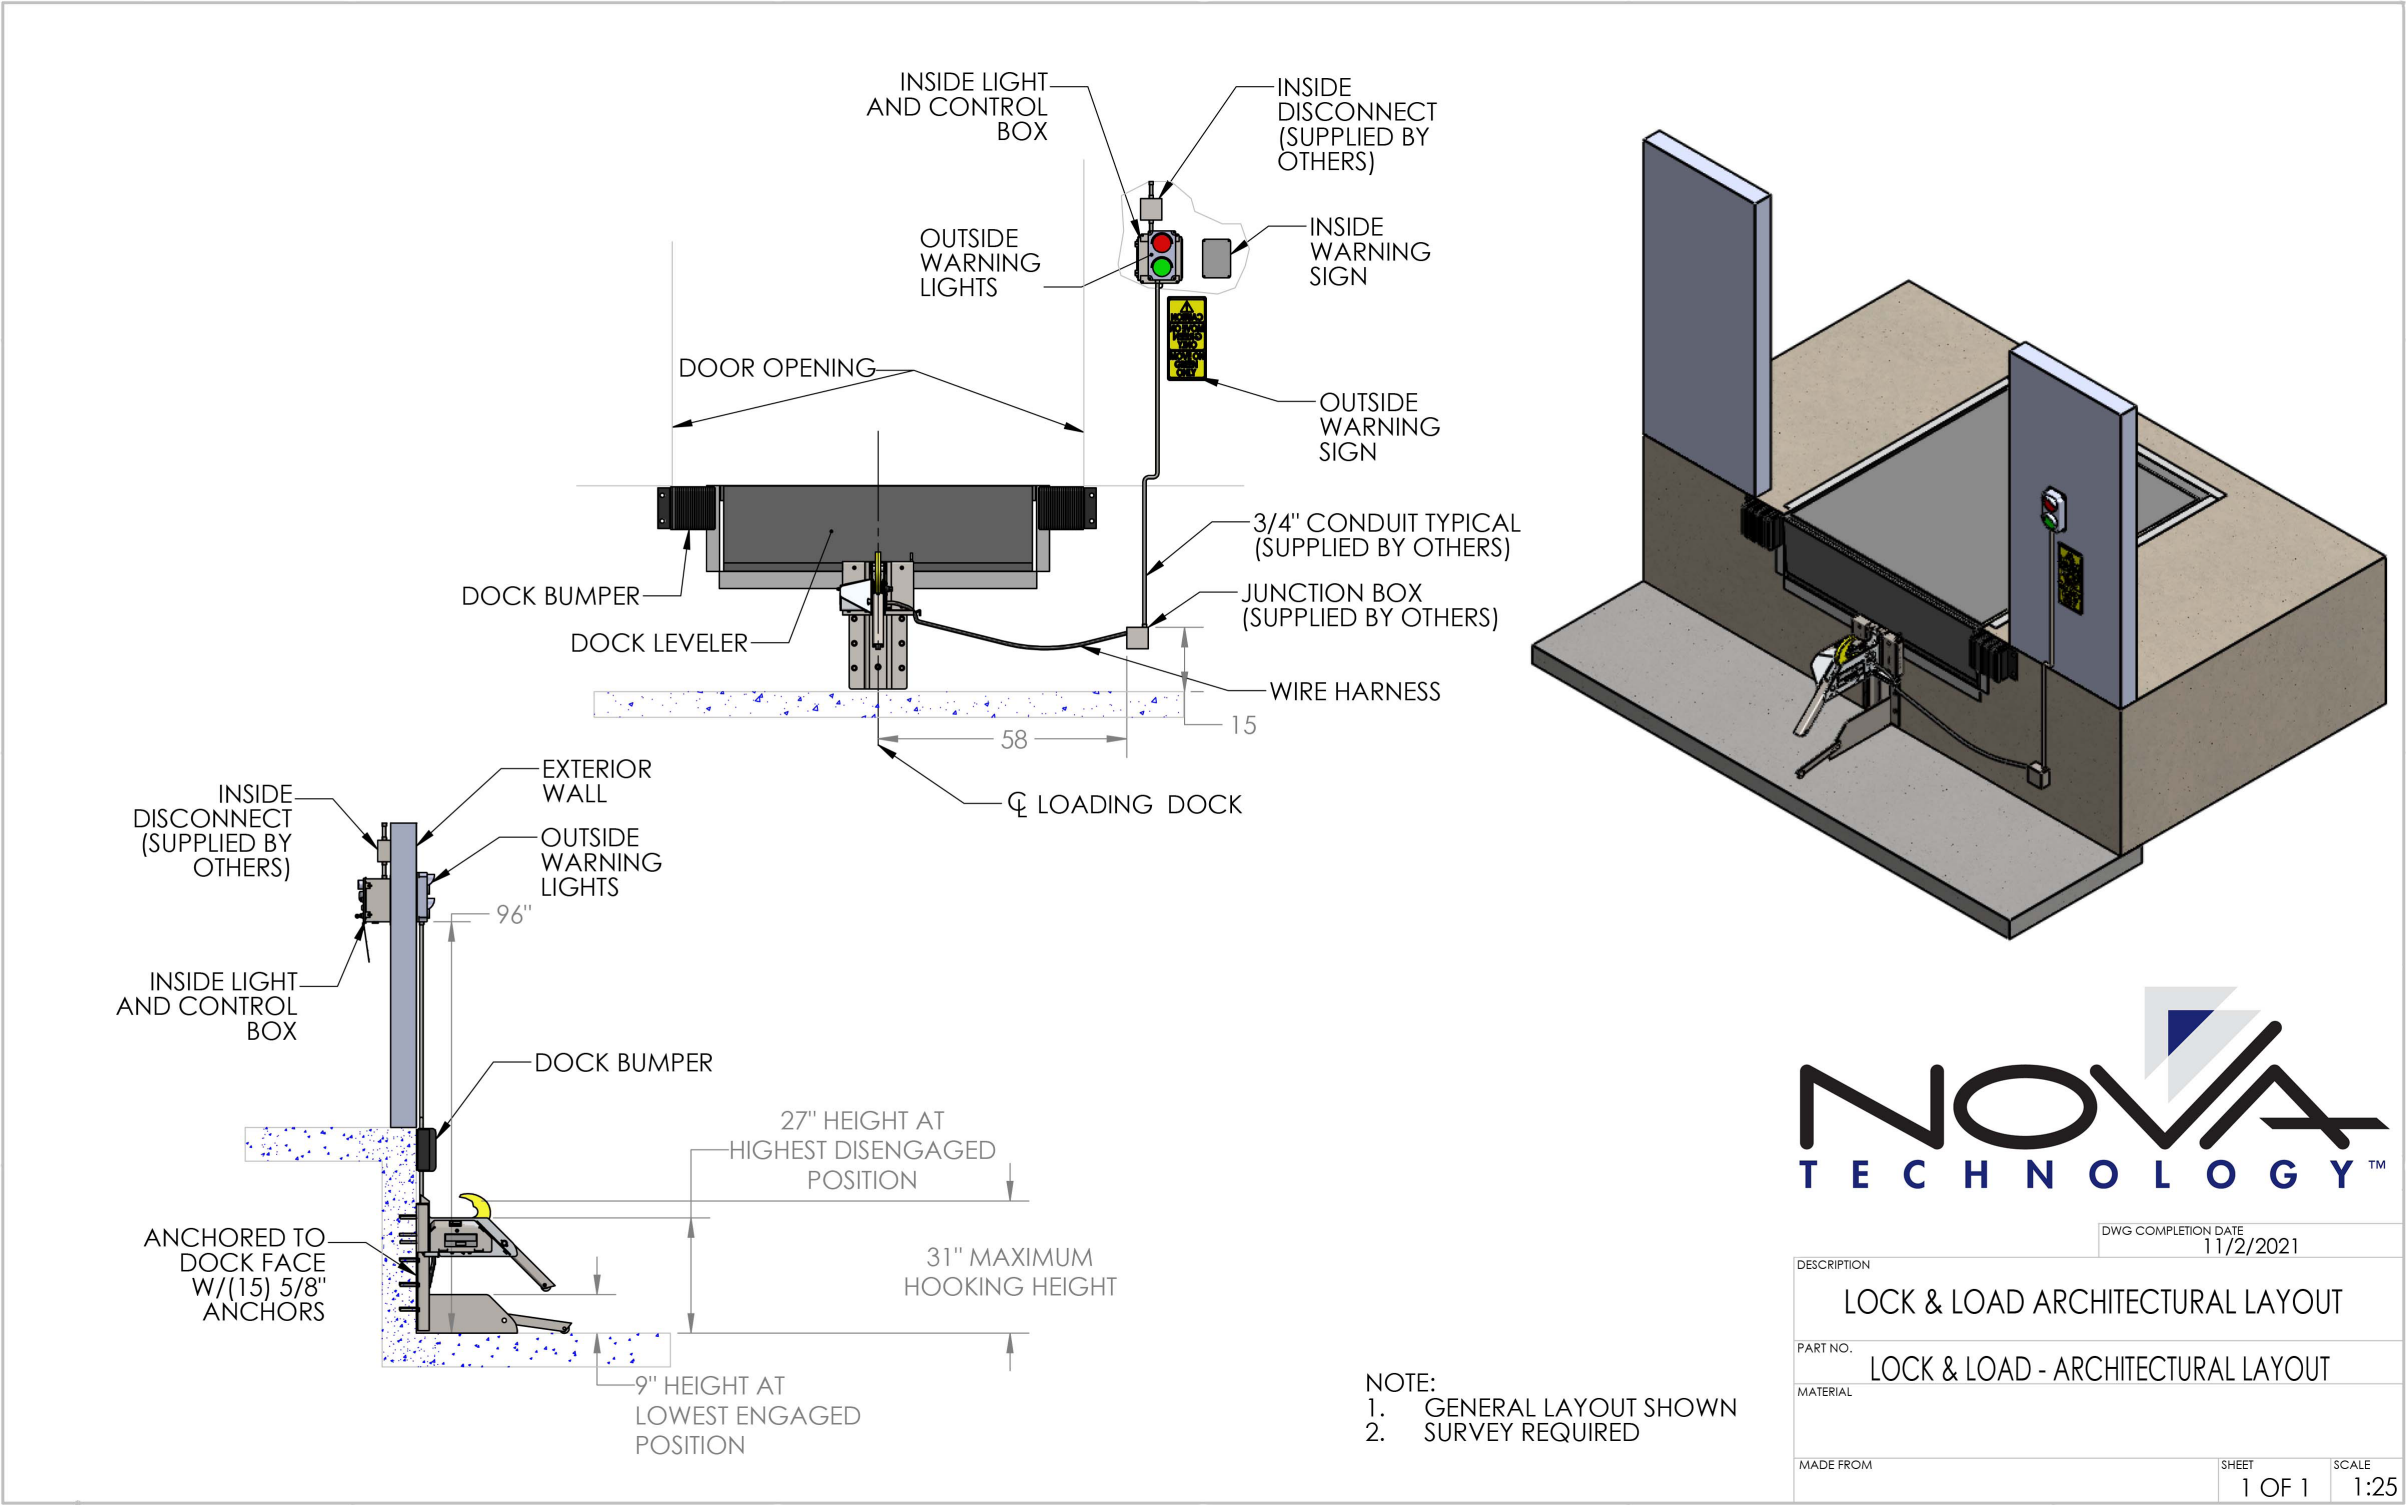

NOVA LOCK & LOAD™

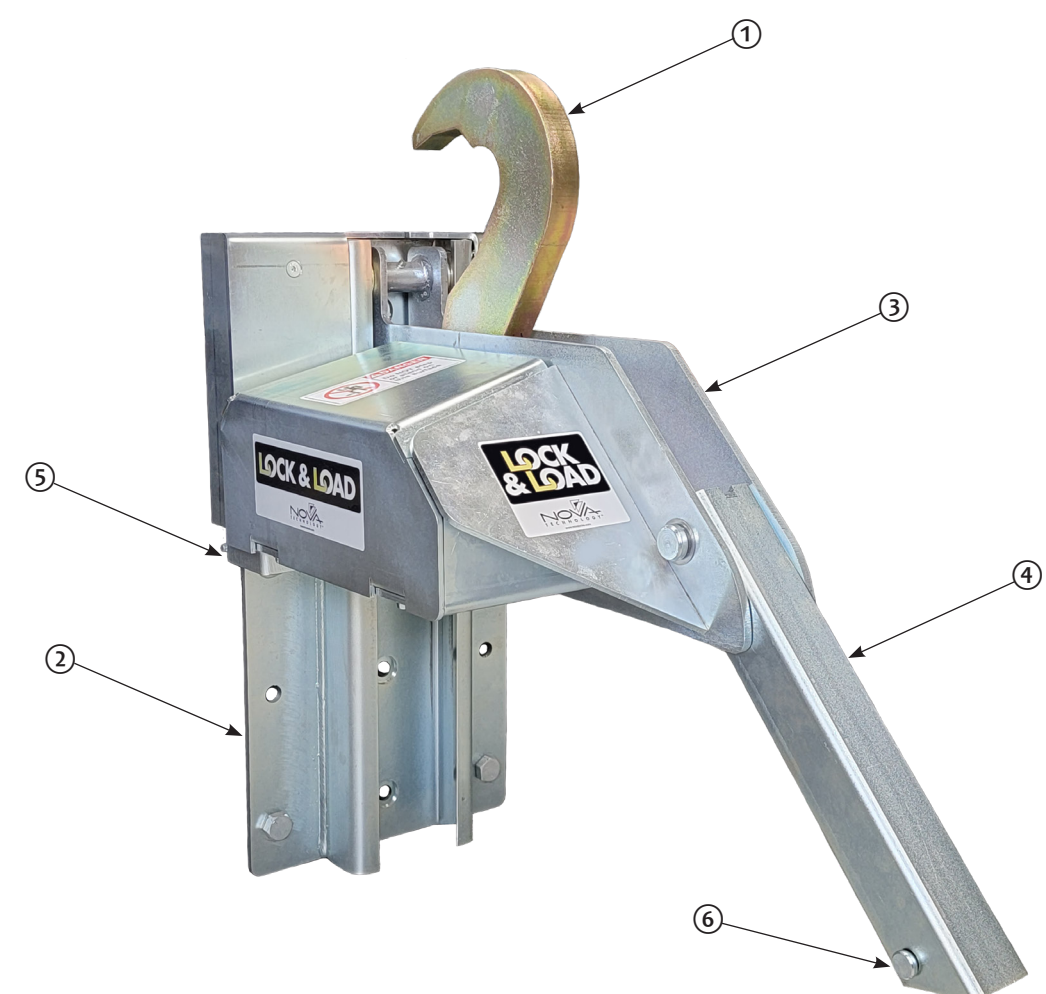

1 – HOOK
2 – ROLLER TRACK ASSEMBLY
3 – CARRIAGE ASSEMBLY

4 – SLOPE EXTENSION
5 – SPRING MOUNTING PLATE
6 – ROLLER ASSEMBLY

STANDARD FEATURES

- ☒ Specially designed gear motor keeps the hook continuously engaged
- ☒ Roller Slope Extension effortlessly rolls on pavement
- ☒ Over 38,000-pounds of restraining force
- ☒ LED inside and outside light communication package
- ☒ Interior and exterior signage
- ☒ Low-profile carriage with an engagement range of 9 to 31-inches
- ☒ Zinc-plated track and housing provides high corrosion resistance
- ☒ Standard bypass/override is password-protected for use by authorized personnel only
- ☒ Upward bias rotating hook ensures the RIG is secure
- ☒ Hook maintains engagement with the RIG even if power is lost
- ☒ The motor is IP67 compliant
- ☒ Non-contact, frictionless system

OPTIONAL FEATURES

- ☐ IntelliDock Combination control box
- ☐ Open dock stanchion for control box
- ☐ Articulated slope extension
- ☐ Brackets and plates
- ☐ Green light interlock with leveler or door



 **WARNING:** Cancer and Reproductive Harm-www.P65Warnings.ca.gov