


SURVEY INFORMATION

INSTRUCTIONS

1. Survey must be completed based upon conditions at time of installation.
2. Dock face must be clear of any obstructions prior to installation of the Lock-Up™.
3. Lights and signs must be mounted in full view of forklift and tractor-trailer operations.
4. Examples of why bracketing may be required:
 - A. Sloped approach greater than 1/2" per foot.
 - B. Bumper projection over 4". (Bumpers are manufactured to nominal sizes; actual projection must be verified.)
 - C. Insufficient embedded front pit curb angle.
 - D. 24" deep pits.
5. Other than solid concrete dock face (6" thick minimum).
6. Hollow "D" and flex steel bumpers not acceptable.
7. If Question 23 is positive for Existing Brackets or Dock Face Obstructions, attach photos of each affected Dock Position. These special applications will require optional equipment.

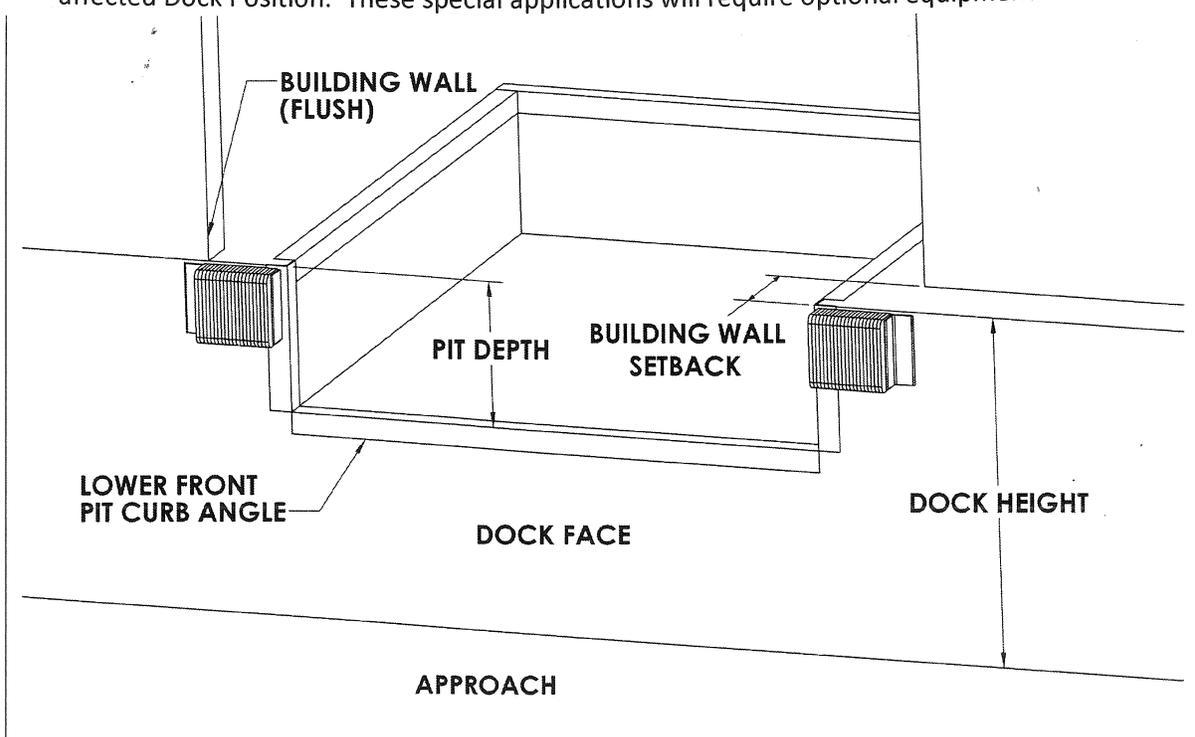

Customer: _____	NOVA #: _____
Surveyed by: _____	Date: _____ Quantity: _____

1. Dock/Door #'s: _____
2. Is the Dock Leveler Truck Activated? If yes, consult factory.
3. Bottom of Lip to Ground: _____ Inches NOTE: Enter "0" for no leveler.
4. Lip Saddle Projection from Dock Face: _____ Inches

5. Barrier Lip

- Yes No

6. Top of Pit Angle to Ground/Front Frame Depth: _____ Inches

NOTE: Enter front frame height for levelers on self standing frames. Enter "0" if no leveler or EOD type leveler.

7. Dock Height: _____ Inches

8. Dock Face Mounting Surface

- | | |
|--|--|
| <input type="checkbox"/> Concrete, solid tilt-up precast, min 6" thick | <input type="checkbox"/> Concrete, min 6" thick, embedded mounting plate |
| <input type="checkbox"/> Brick/cinder block, hollow tilt-up/precast | <input type="checkbox"/> Stub wall (partial wall w/open pit) |
| <input type="checkbox"/> Legs/Self Standing Frames - (Consult Factory) | <input type="checkbox"/> Other |

9. Is the pit floor material concrete?

- Yes No

10. If pit does not exist, is the dock floor concrete?

- Yes No

11. Is there an existing pit floor plate bracket?

- Yes No

12. Bumper Projection: _____ Inches

13. Lower Front Pit Curb Angle

- 3 x 3 4 x 4 None Pan Material

14. Wall Position to Dock Face

- Flush Protruding Set Back

15. Amount of Wall Set Back/Protrusion: _____ Inches


16. Cantilever Height Off Approach: _____ Inches

17. Projection of Cantilever: _____ Inches

18. Sub-frame Position to Dock Face:

- Flush Protruding Set Back Not Applicable

19. Sub-frame Set Back/Protrusion: _____ Inches

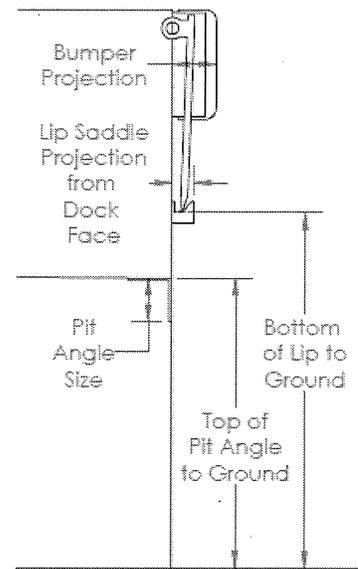

20. Will Yard Jockeys be Used:


- Yes No

21. Drive/Approach Material at Dock Face:

- Concrete Asphalt Gravel/Dirt Other: _____

22. Is the Approach Level or Sloped?

- Level (Note: If Level, disregard questions A, B & C below) Sloped (Note: If Sloped, complete questions A, B & C below)

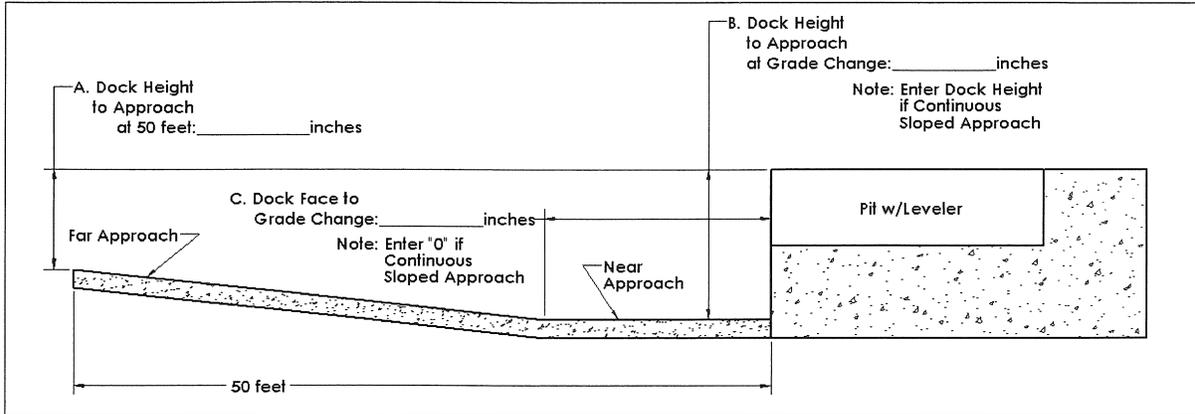

23. Will this application incorporate Trailer Lifts, Wheel Risers, Existing Brackets (Aftermarket Upgrade) or Obstructions on the Dock Face?

- No Existing Brackets (Upgrade) Trailer Lift Dock Face Obstructions
 Wheel Risers

24. If a Trench Drain is located within 4 feet of the Dock Face, provide dimensions A and B.

25. Will manufacturer supply cantilever bracket?



- Yes No

26. Will manufacturer supply floor bracing?



- Yes No

27. Will manufacturer supply additional anchors?

- Yes No

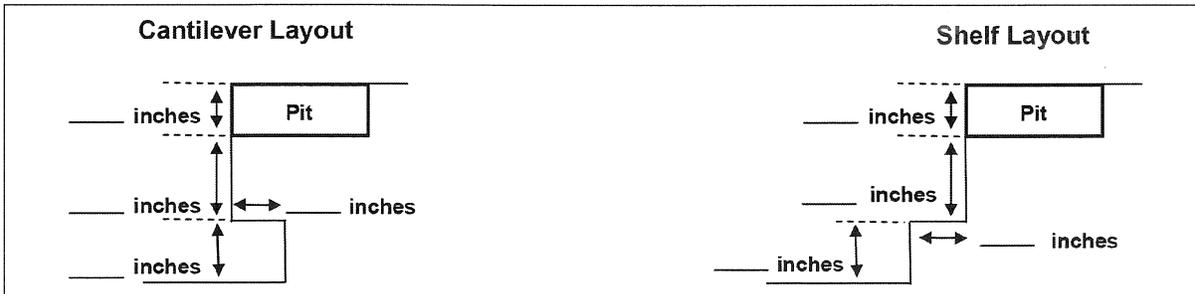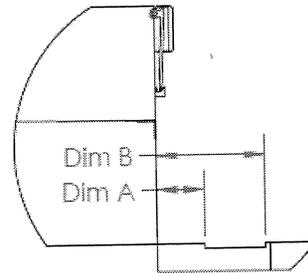

THIS SECTION MUST BE COMPLETED FOR EDGE OF DOCK LEVELERS

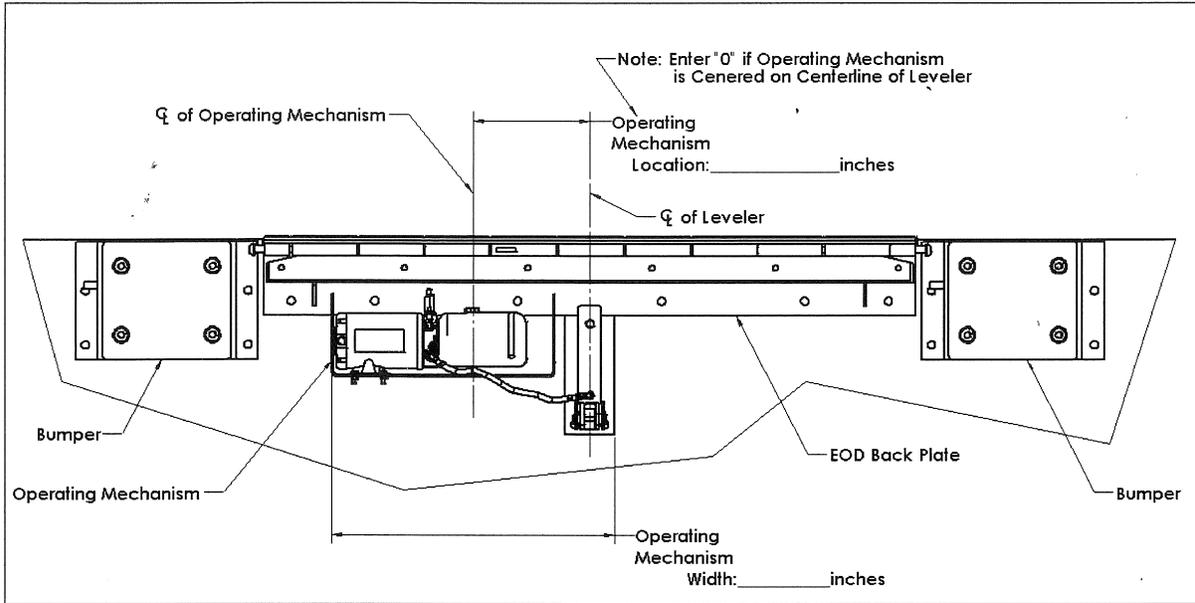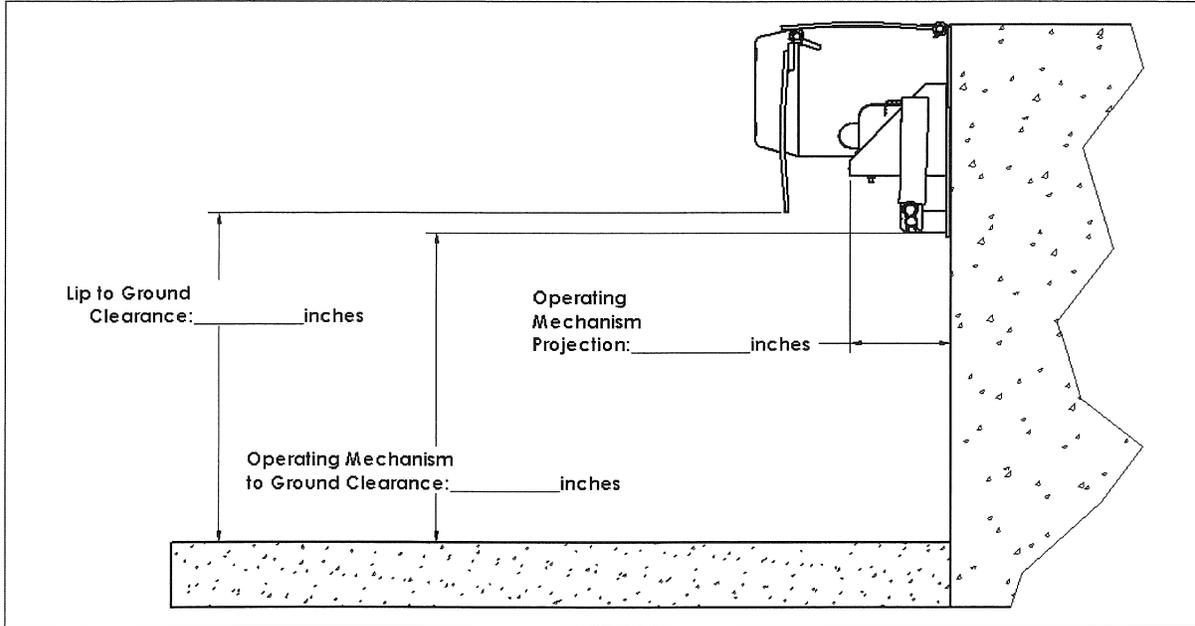

N90W14507 Commerce Drive, Menomonee Falls, WI 53051
phone 262-502-1591 | 800-236-7325 | fax 262-502-1511 | www.novalocks.com